

Code: MDR-60-12

## SWITCHING ADAPTER **MDR-60-12**

Net: **30.80 EUR** Gross: **30.80 EUR**

Switching adapter installed on the TS35/7.5 or 15 DIN rail, resistant to high operation temperatures (up to 70°C).



### SPECIFICATION

Adapter type:	Switching
Power voltage:	100 ... 240 V AC
Output voltage:	12 V DC
Output voltage adjustment:	12 ... 15 V
Voltage tolerance:	± 1 %
Maximal load:	5 A
Output power:	60 W
Number of outputs:	2 pcs
Efficiency:	86 %
Housing type:	DIN
MTBF (Mean Time Between Faults):	299200 hours
Vibration resistance:	IEC60068-2-6, 10 ... 500 Hz max. 2 G for 90 minutes
Protections:	<ul style="list-style-type: none"><li>• Short-circuit</li><li>• Overvoltage</li><li>• Overload protection</li></ul>
Operation temp. / Relative humidity:	-20 °C ... 70 °C / < 90 %
Weight:	0.28 kg
Dimensions:	40 x 90 x 100 mm
Guarantee:	2 years

### PRESENTATION

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60


Front panel:




Side view:



Rear panel (DIN rail installation):

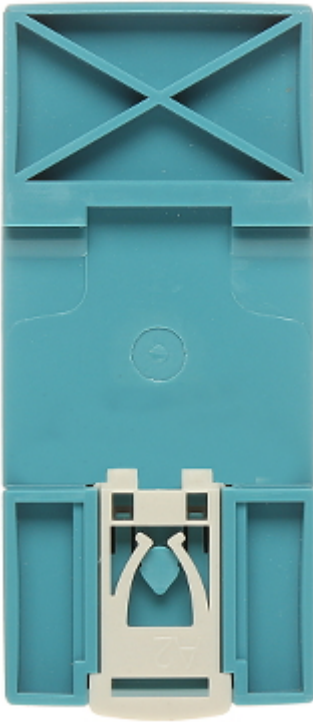

Dimensions:

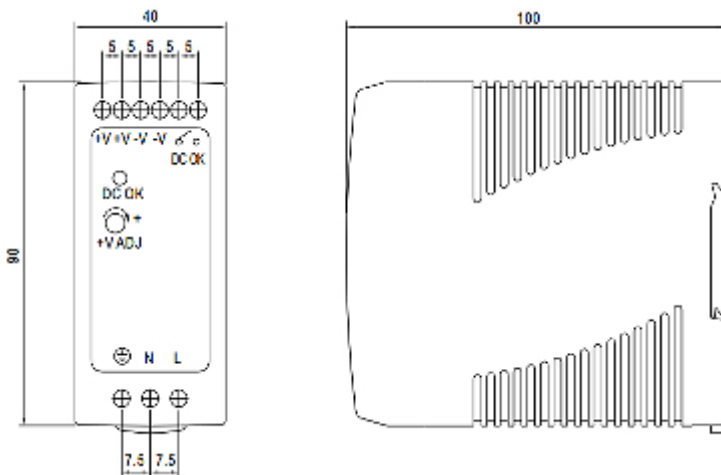

**PACKAGE**

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

