


Code: PK-552

RELAY MODULE PK-552

Net: 2.43 EUR Gross: 2.43 EUR

It can be used to increase maximal load of controller transistor output line and for galvanic isolation between output line and load point.

The relay module can be used to control devices with high current consumption through the OC outputs of alarm systems, recorders, etc.

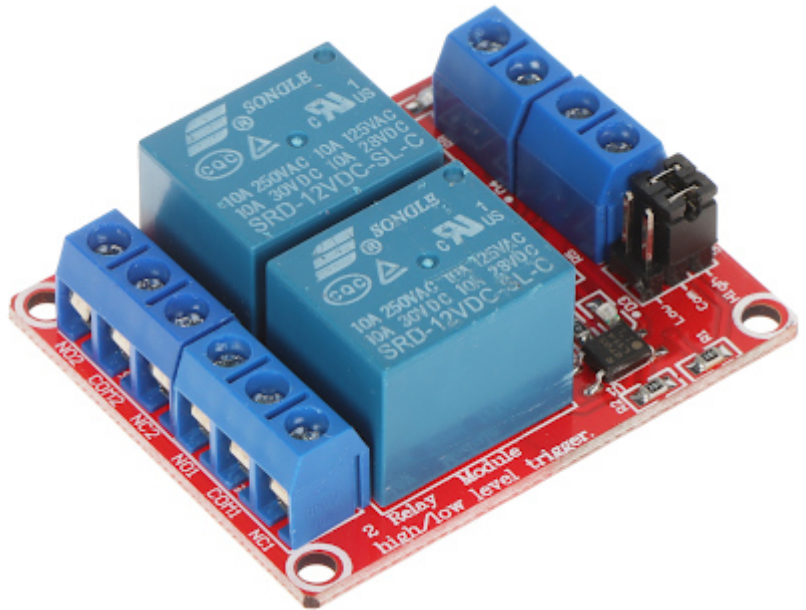


SPECIFICATION


| | |
|--------------------------|---|
| Number of relay outputs: | 2 |
| Power supply: | 12 V DC |
| Current consumption: | <ul style="list-style-type: none">• 111 mA,• 5 mA - IN input |
| Relay maximal load: | 10 A (max) @ 28 V DC / 30 V DC / 125 V AC / 250 V AC |
| Output: | 2 x NO/NC |
| Main features: | <ul style="list-style-type: none">• relay inputs triggering by low or high voltage - Set with jumpers,• LED indication |
| Weight: | 0.03 kg |
| Dimensions: | 50 x 41 x 19 mm |
| Guarantee: | 2 years |


PRESENTATION

Top view:

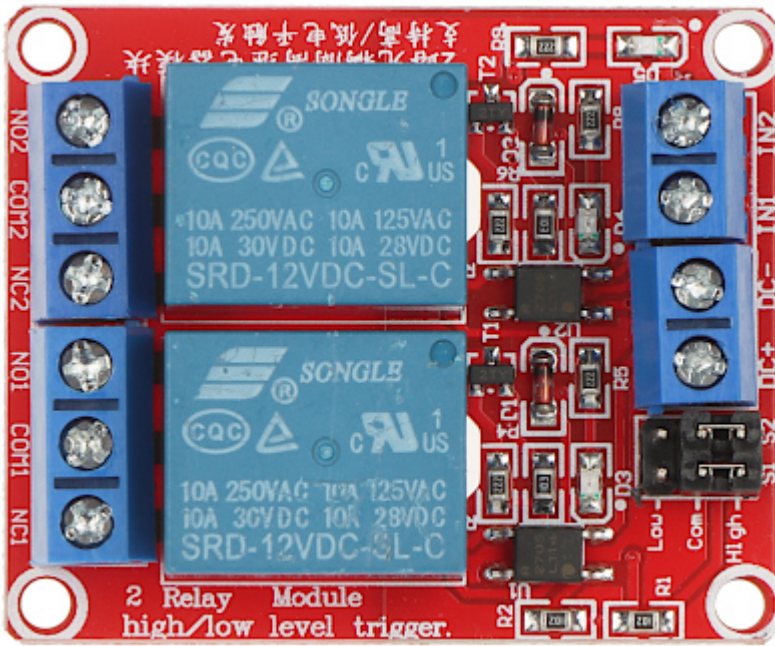

Connectors:

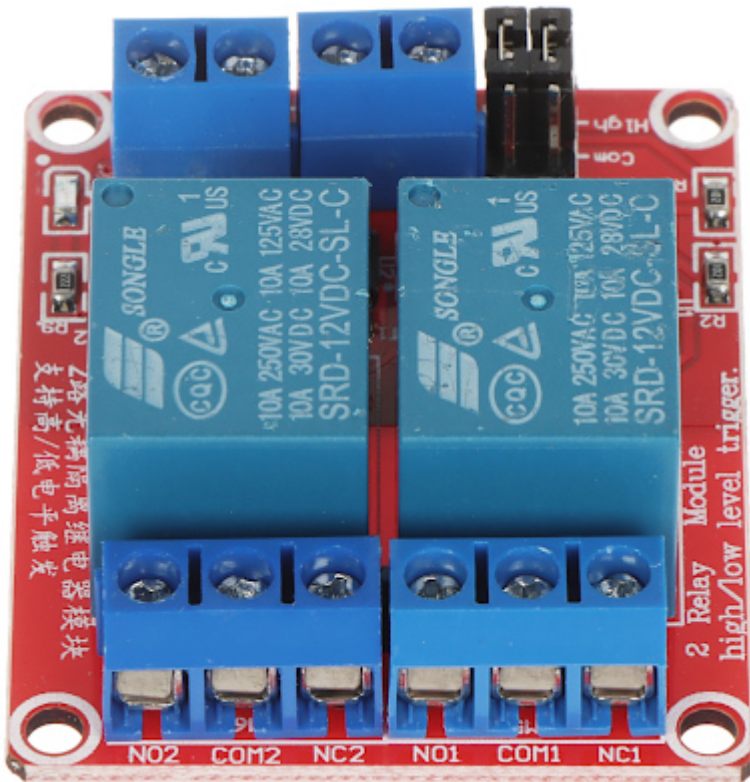

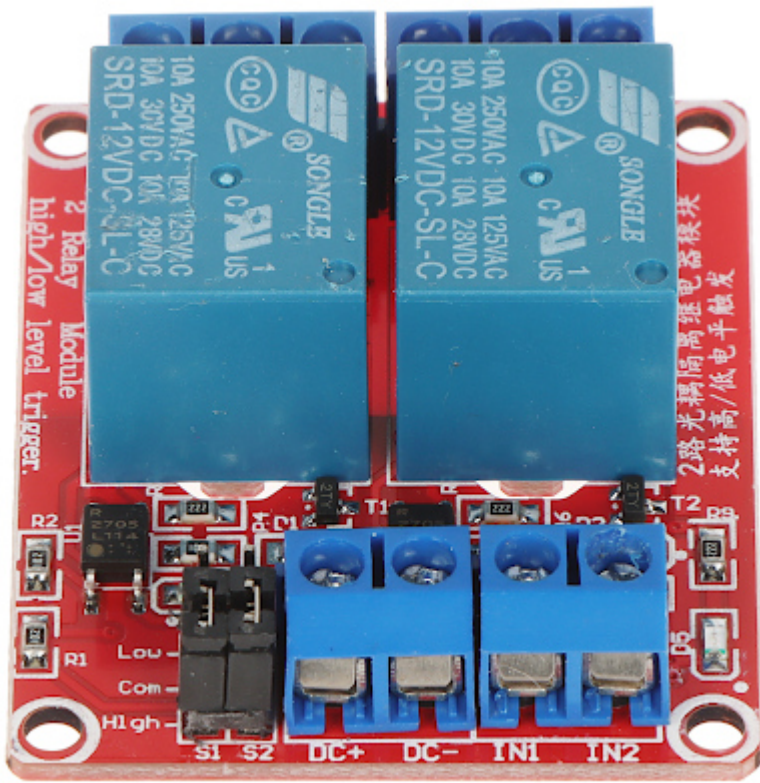

PACKAGE

| | |
|----------------------------------|--------------------|
| Dimensions (L x W x H): 0x0x0 mm | Gross Weight: 0 kg |
|----------------------------------|--------------------|