

Code: P-HF41F-012-ZS

RELAY P-HF41F-012-ZS

Net: 2.69 EUR Gross: 3.31 EUR


It can be used to increase maximal load of controller transistor output line and for galvanic isolation between output line and load point.



SPECIFICATION

Number of relay outputs:	1
Power supply:	12 V DC
Current consumption:	14.2 mA @ 12 V DC
Relay maximal load:	6 A (max), 30 V DC / 250 V AC (max)
Output:	1 x NO/NC
Main features:	<ul style="list-style-type: none">• Assembly - PCB, Socket• Contacts arrangement - SPDT• IP67
Operation temp:	-40 °C ... 80 °C
Weight:	0.005 kg
Dimensions:	28 x 15 x 5 mm
Guarantee:	2 years

PRESENTATION

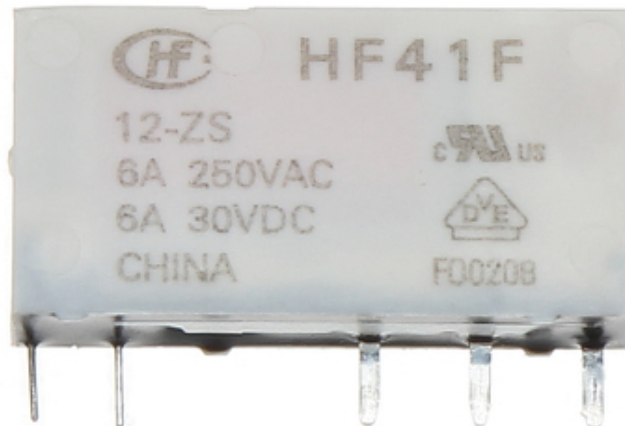

Dimensions:

