


Code: PK4-12-ZN/S

## NORMALLY OPEN RELAY MODULE **PK4-12-ZN/S** DELTA

Net: **16.51 EUR** Gross: **20.31 EUR**

It can be used to increase maximal load of controller transistor output line and for galvanic isolation between output line and load point.

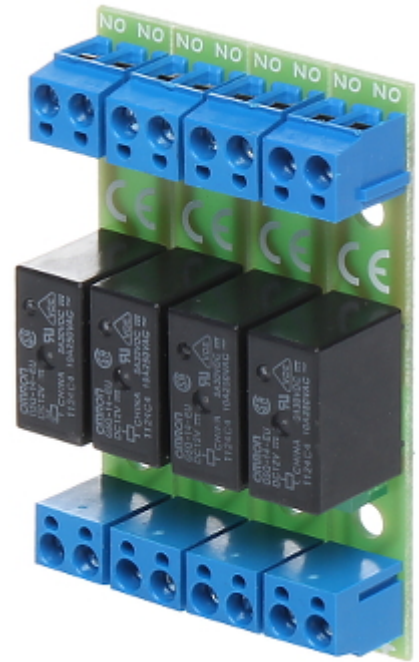

### SPECIFICATION

Number of relay outputs:	4
Power supply:	10 ... 16 V DC
Current consumption:	35 mA per each relay at voltage 12 V DC
Relay maximal load:	10 A (max), 30 V DC / 50 V AC (max)
Output:	4 x NO
Application:	relay for electromagnetic lock/electric strike
Main features:	<ul style="list-style-type: none"><li>• Mounting with self-adhesive bases,</li><li>• Screw mounting with spacers,</li><li>• LED indication,</li><li>• Protections : Overvoltage, Reverse polarity connection</li></ul>
Operation temp:	-10 °C ... 40 °C
Weight:	0.05 kg
Dimensions:	69 x 45 x 20 mm
Manufacturer / Brand:	DELTA
Guarantee:	<b>3 years</b>



### PRESENTATION

Top view:

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60




Connectors:

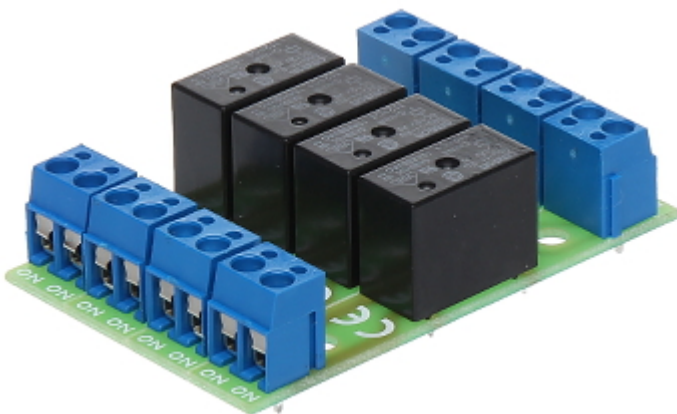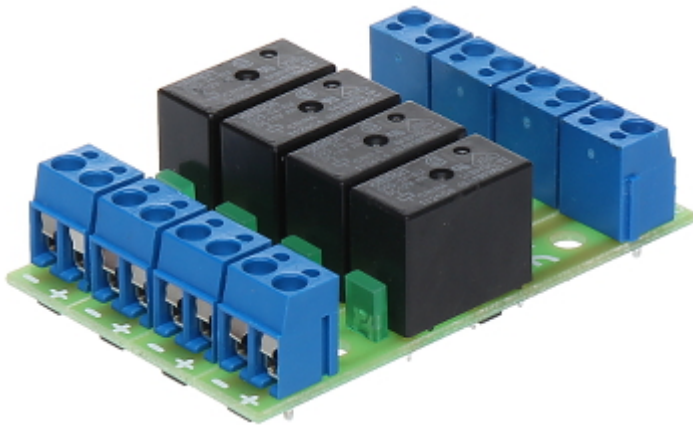

In the kit:



Schematic diagram:

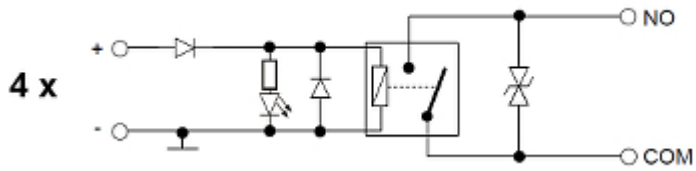

**PACKAGE**

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

