

Code: PK4-12-ZW

## NORMALLY OPEN RELAY MODULE **PK4-12-ZW**

Net: **15.77 EUR** Gross: **15.77 EUR**

It can be used to increase maximal load of controller transistor output line and for galvanic isolation between output line and load point.



### SPECIFICATION

Number of relay outputs:	4
Power supply:	10 ... 16 V DC
Current consumption:	35 mA per each relay at voltage 12 V DC
Relay maximal load:	10 A (max), 30 V DC / 50 V AC (max)
Output:	4 x NO
Application:	relay for electromagnetic lock/electric strike
Main features:	<ul style="list-style-type: none"><li>• LED indication,</li><li>• Protections : Overvoltage, Reverse polarity connection</li><li>• Splash-proof casing</li></ul>
Operation temp:	-25 °C ... 70 °C
Weight:	0.12 kg
Dimensions:	118 x 91 x 37 mm
Manufacturer / Brand:	DELTA
Guarantee:	<b>3 years</b>

### PRESENTATION

Internal view of the housing:




View with closed cover:



Mounting side view:



Schematic diagram:

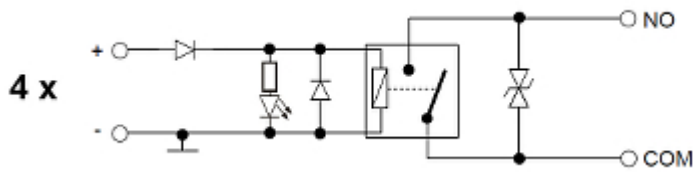

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

