


Code: PK1-12-ZPC

TIME RELAY MODULE **PK1-12-ZPC** DELTA

Net: **6.25 EUR** Gross: **7.69 EUR**

The PK1-12-ZPC allows the extension of the short trigger pulse for the time set by potentiometer. The device can be used to extend short control pulses, controlling the operation of bolts, electromagnetic jumpers, bistable control, and also to make the shift in access control projects, depending on the status of the controller, door opening sensor (reed), exit button, etc.

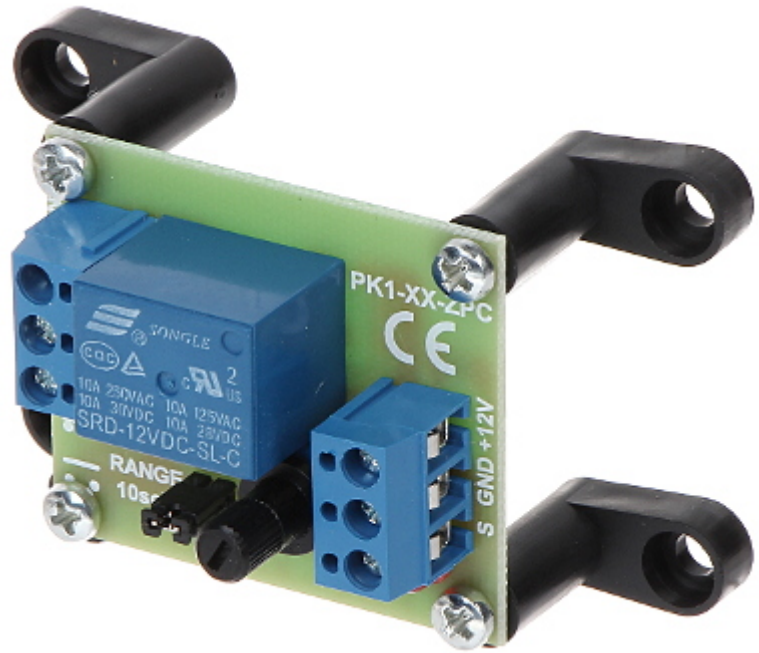


SPECIFICATION

Number of relay outputs:	1
Power supply:	10 ... 16 V DC
Current consumption:	35 mA (max)
Relay maximal load:	10 A (max) @ 30 V DC / 50 V AC (max)
Output:	1 x NO/NC
Main features:	<ul style="list-style-type: none">• Time settings range1. Range : 2 s ... 60 s ,2. Range : 10 s ... 10 minutes• LED indication
Operation temp:	-10 °C ... 40 °C
Weight:	0.025 kg
Dimensions:	47 x 40 x 23 mm
Manufacturer / Brand:	DELTA
Guarantee:	3 years


PRESENTATION



Top view:

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

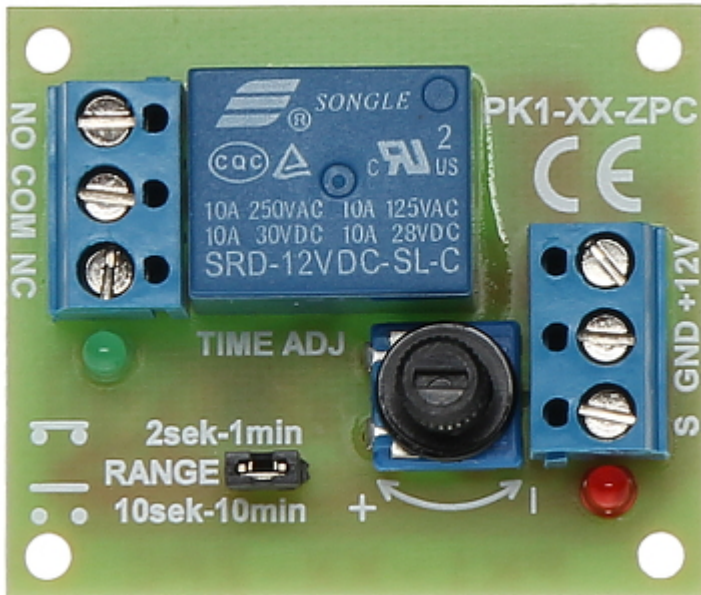


Connectors:

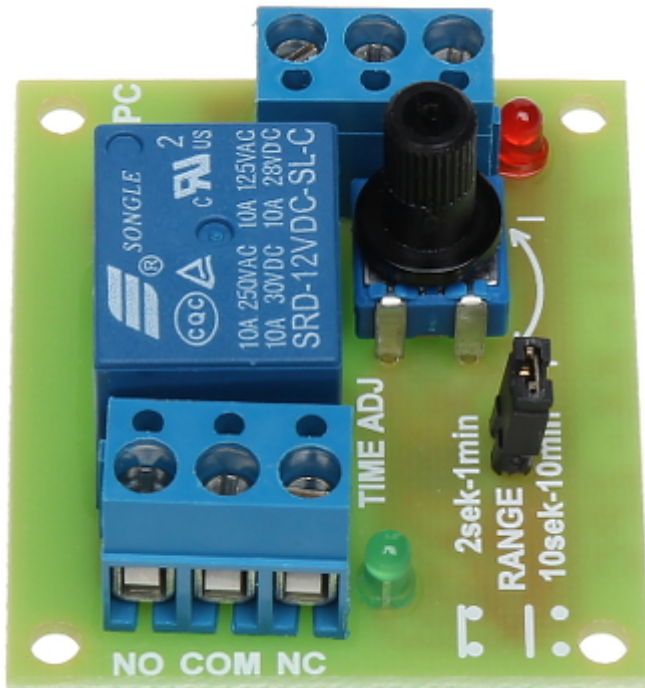

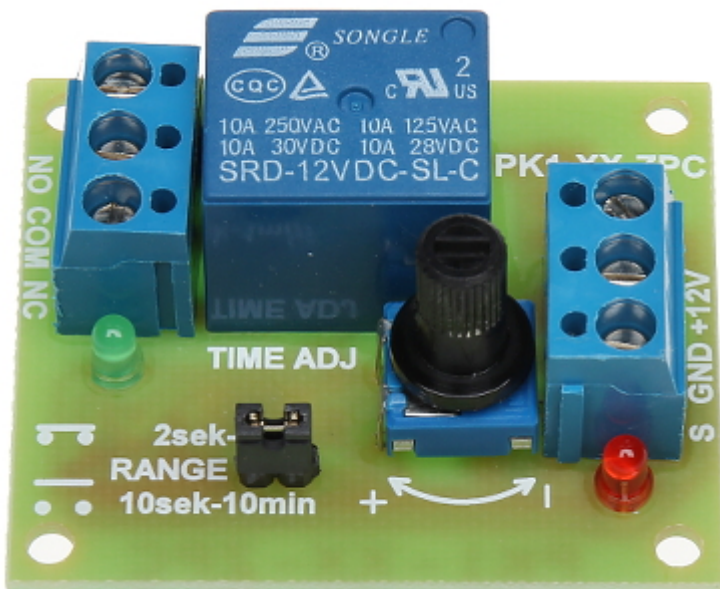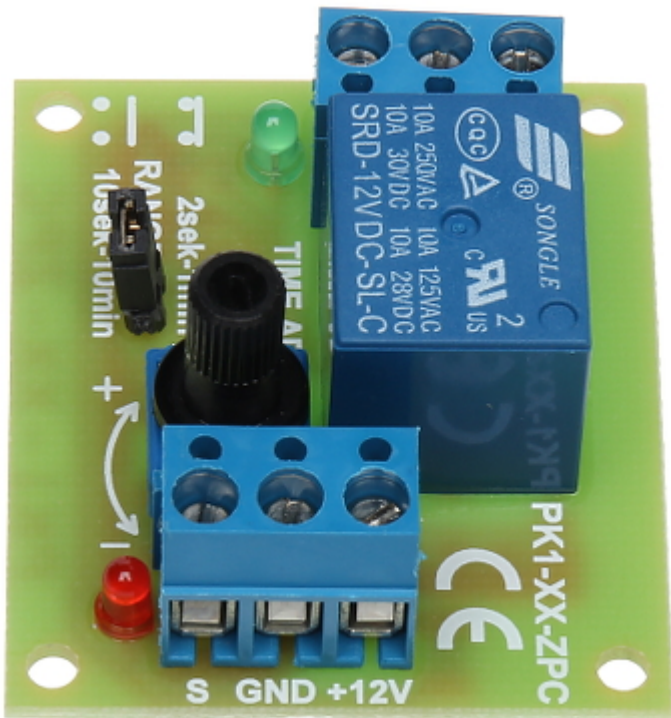


Schematic diagram:

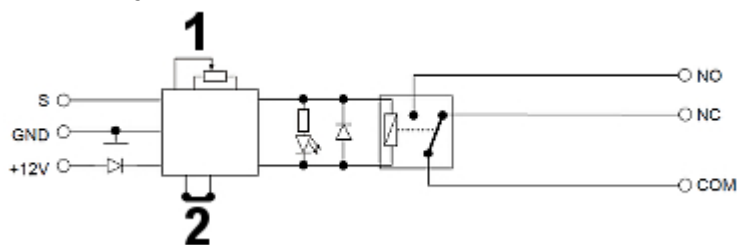

1. Smooth time control
2. Range

The device can be conveniently mounted on the (*DIN TS-35*) rail:

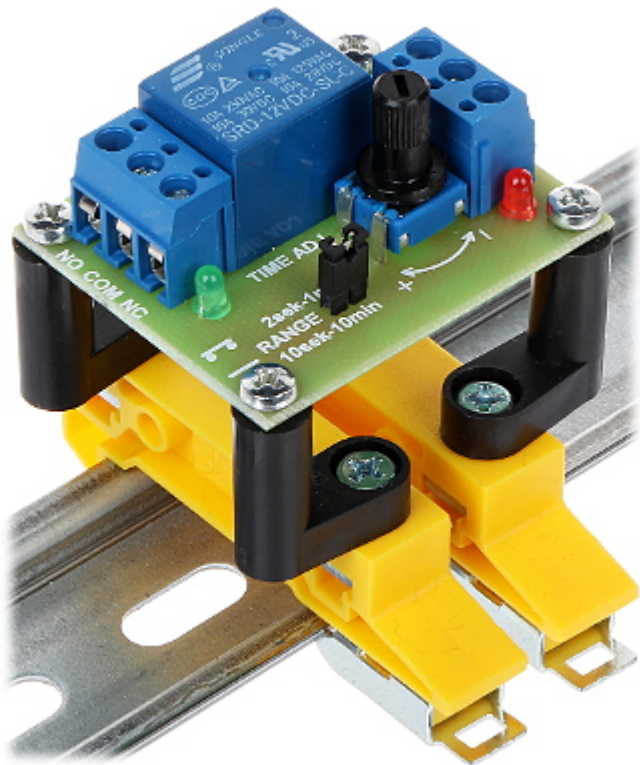


For this purpose mount the WM-35 (available separately):



Then install the LPCB-1 (included):



The whole must be made as shown below:

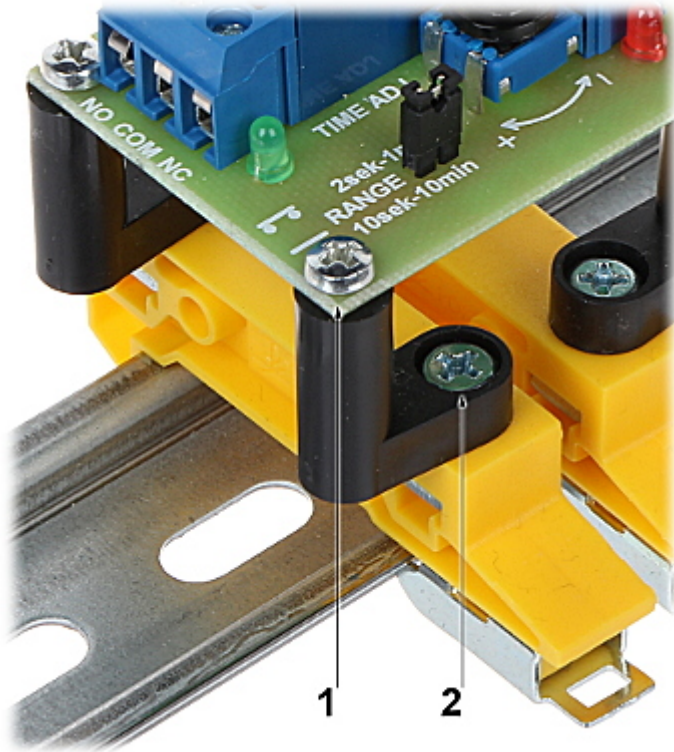

- 1) M3 x 10 screw
 - 2) M4 x 12 screw
- In the kit:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------