


Code: PSAC-08246

# AC POWER SUPPLY ADAPTER **PSAC-08246** METAL ENCLOSURE TRANSFORMING

Net: **96.26 EUR** Gross: **118.40 EUR**

Power adapter is equipped with aesthetic, solidly made metal casing box. Power adapter output voltage is AC 24V/27V. It allows to connect up to 8 devices. Maximal load for the one output is 0.75A, but you should remember the total load for all outputs must be lower than 6A. Each output is protected independently with glass or PTC polymer fuse (jumper selection).

Attention! If the power adaptor is using for continuous work (24H) the rated current of the adaptor should be less than 80% of the maximal current. Please pay attention for proper cooling conditions of the power adaptor during work!

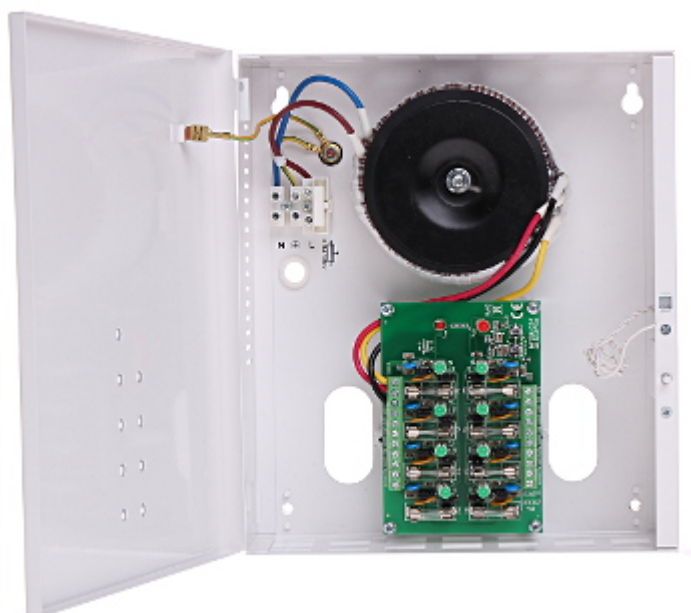

## SPECIFICATION

Adapter type:	Transforming
Output voltage:	24 / 27 V AC
Output voltage adjustment:	✓ (step adjustment)
Max. output current (total):	6 A
Max. output current for single output:	0.75 A
Outputs protection:	1 A Polymer / Glass Fuse
LED indication:	✓
AW output (fault) - OC type 50mA, LED indication of at least one output fault:	✓
Protection:	<ul style="list-style-type: none"><li>• Short-circuit</li><li>• Overload</li><li>• Overheat</li><li>• Overvoltage</li><li>• Tamper</li></ul>
Input voltage:	230 V @ 50Hz
Power:	150 VA
Number of outputs:	8
Connector type:	Cable terminals
Housing type:	Metal, wall-mounted
Key closed:	—
Weight:	3.0 kg
Dimensions:	246 x 215 x 64 mm
Manufacturer / Brand:	PULSAR

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60

Guarantee:

2 years

## PRESENTATION

Front view:



Rear view - power cables holes (rear and bottom):





DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60