


Code: POE-044816

## POE POWER ADAPTER **POE-044816**

Net: **35.79 EUR** Gross: **35.79 EUR**

The POE-044816 is designed to powering devices using PoE technology. This technology allows to run the system with only one UTP/FTP cable which transmits data and provides supplying voltage. Please pay attention for proper cooling conditions of the power adaptor during work!  
Attention! The power cord is not included (230V AC).

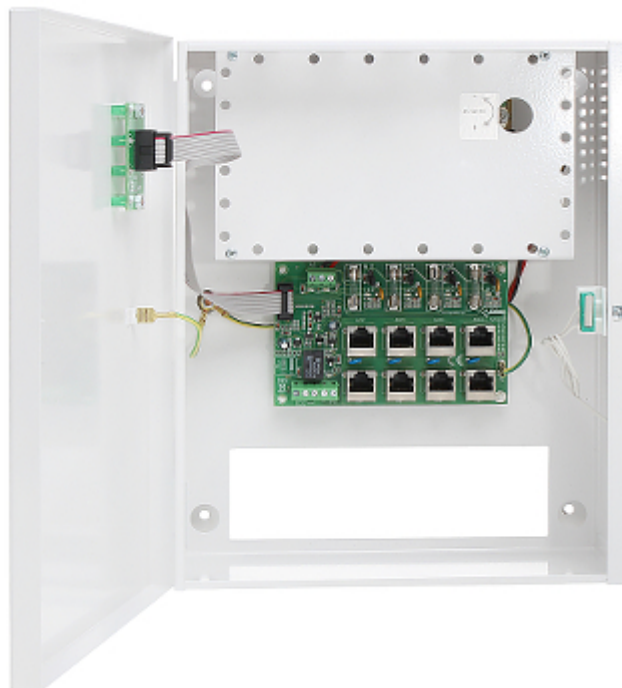


### SPECIFICATION

|                         |                                                                                                                                                                                                                    |
|-------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Adapter type:           | Switching                                                                                                                                                                                                          |
| Number of inputs:       | 4 x RJ-45 socket                                                                                                                                                                                                   |
| Number of outputs:      | 4 x RJ-45 socket                                                                                                                                                                                                   |
| Output voltage:         | 42 V ... 54 V DC                                                                                                                                                                                                   |
| Input voltage:          | 88 V ... 264 V AC                                                                                                                                                                                                  |
| Maximal output current: | 4 x 0.4 A                                                                                                                                                                                                          |
| Outputs protection:     | 4 x 0.5 A Glass Fuse / PTC Polymer Fuse                                                                                                                                                                            |
| Protections:            | Overload<br>Overvoltage<br>Overvoltage<br>Short-circuit<br>Tamper                                                                                                                                                  |
| Main features:          | <ul style="list-style-type: none"><li>• FPS output - indicating power supply unit operation state: normal or failure</li><li>• Supported data rates : 10 / 100 Mbps</li></ul>                                      |
| LED indicators:         | <ul style="list-style-type: none"><li>• AC input voltage presence indication</li><li>• DC output voltage presence indication (AUX)</li><li>• Connecting to the device</li><li>• Fuse has gone indication</li></ul> |
| Weight:                 | 2.96 kg                                                                                                                                                                                                            |
| Dimensions:             | 236 x 286 x 118 mm                                                                                                                                                                                                 |
| Manufacturer / Brand:   | PULSAR                                                                                                                                                                                                             |
| Guarantee:              | 2 years                                                                                                                                                                                                            |

### PRESENTATION

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60

Internal view of the housing:

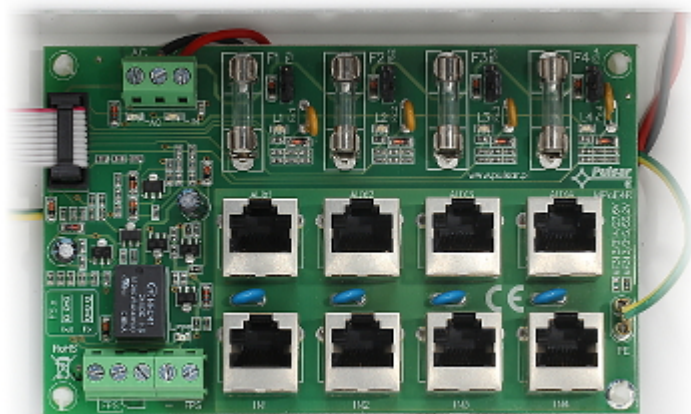


Front view:



Mounting side view:



Dimensions:

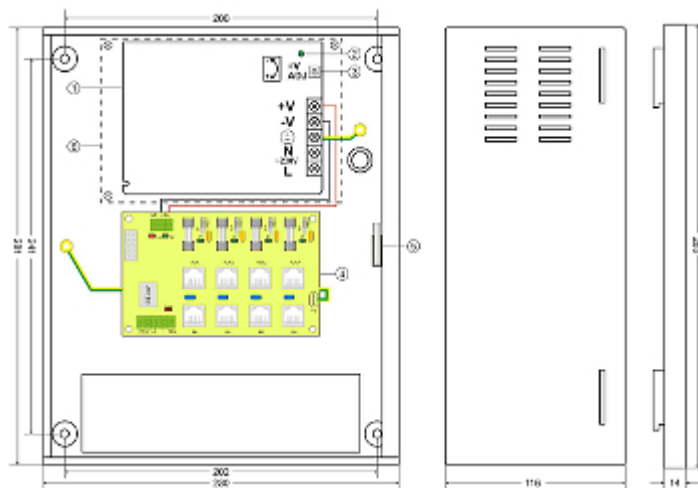

In the kit:



## PACKAGE

|                                  |                    |
|----------------------------------|--------------------|
| Dimensions (L x W x H): 0x0x0 mm | Gross Weight: 0 kg |
|----------------------------------|--------------------|