


Code: SF-1

SOFT START MODULE SF-1

Net: 5.72 EUR Gross: 7.04 EUR

"Soft Start" module limits temporarily high inrush current of the inductive receivers at power up. The module is used as delayed current protection of the toroidal transformers, auto-transformers and halogen lamps.

DANGER! Lethal voltage on board. Use extreme caution! Module should be mounted in enclosures with electrically insulating material with keeping the proper insulating distances.

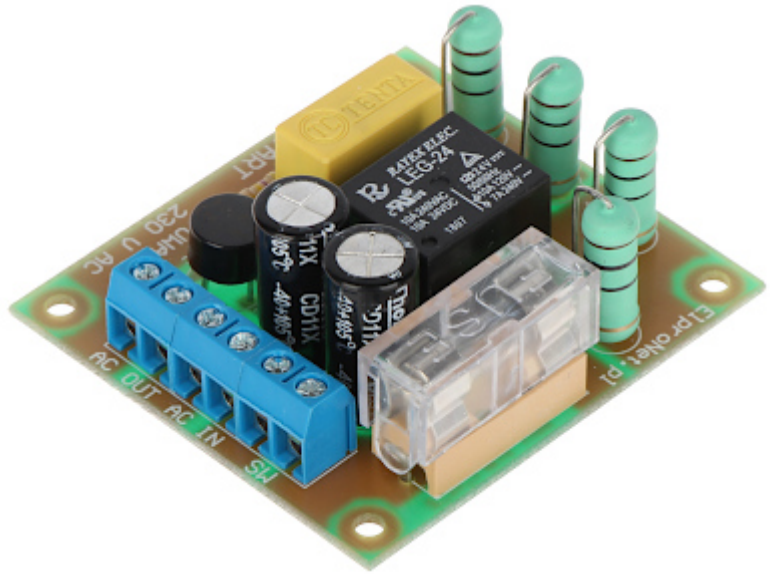


SPECIFICATION


| | |
|---------------------------|--|
| Number of control inputs: | 1 |
| Number of power inputs: | 1 |
| Number of power outputs: | 1 |
| Voltage: | 230 V AC |
| Maximal output power: | 1150 W |
| Protection type: | 5 A 5/20mm delayed fuse |
| Connectors type: | 3 x screw terminals max. 1.5 mm ² |
| Montage hole diameter: | 3 mm |
| Mounting holes distance: | 52 x 47 mm |
| Dimensions: | 60 x 55 x 28 mm |
| Weight: | 0.04 kg |
| Guarantee: | 2 years |

PRESENTATION

Top view:

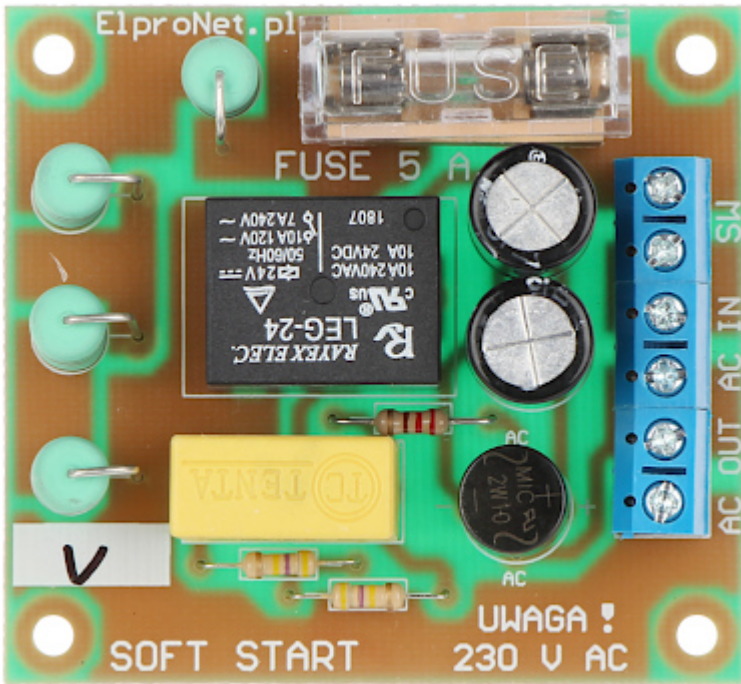

Connectors view:

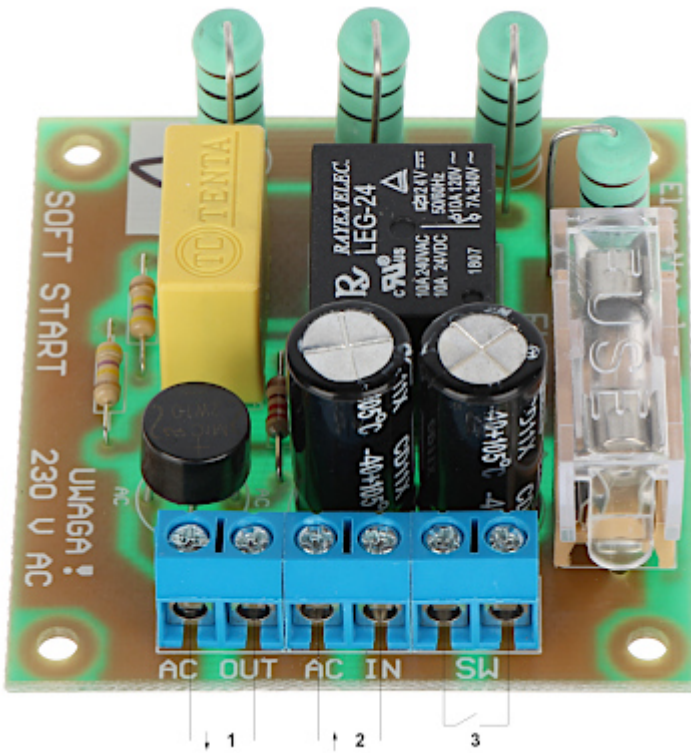

1. To receiver
2. 230 V AC input
3. Switch or lock