


Code: SF-1

SOFT START MODULE SF-1

Net: 23.58 PLN Gross: 29.00 PLN

"Soft Start" module limits temporarily high inrush current of the inductive receivers at power up. The module is used as delayed current protection of the toroidal transformers, auto-transformers and halogen lamps.

DANGER! Lethal voltage on board. Use extreme caution! Module should be mounted in enclosures with electrically insulating material with keeping the proper insulating distances.

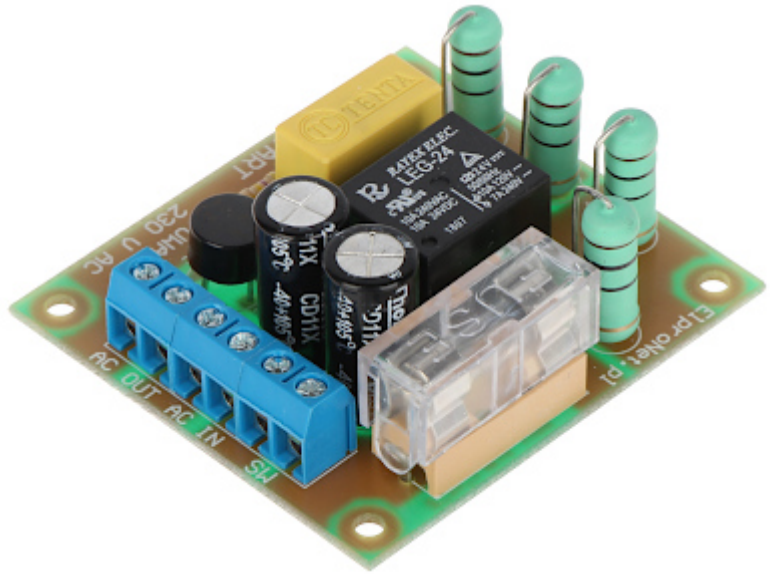


SPECIFICATION

Number of control inputs:	1
Number of power inputs:	1
Number of power outputs:	1
Voltage:	230 V AC
Maximal output power:	1150 W
Protection type:	5 A 5/20mm delayed fuse
Connectors type:	3 x screw terminals max. 1.5 mm ²
Montage hole diameter:	3 mm
Mounting holes distance:	52 x 47 mm
Dimensions:	60 x 55 x 28 mm
Weight:	0.04 kg
Guarantee:	2 years


PRESENTATION

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Top view:

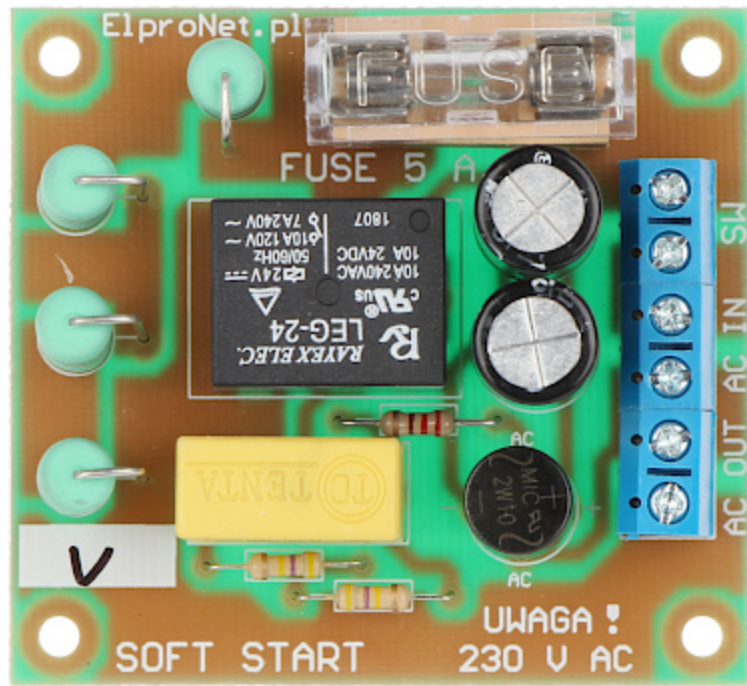

Connectors view:

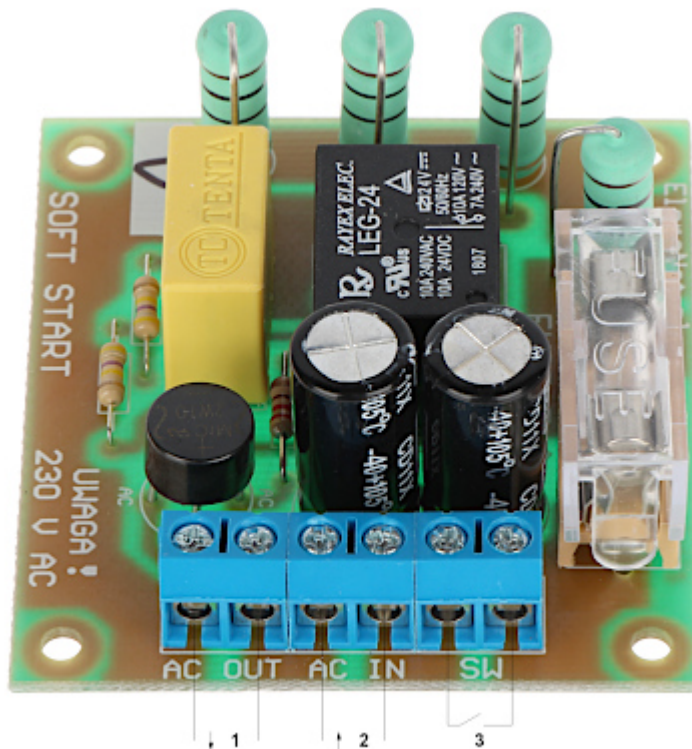

1. To receiver
2. 230 V AC input
3. Switch or jumper