


Code: LZ-1S

POWER SUPPLY DISTRIBUTOR LZ-1S

Net: 4.60 EUR Gross: 5.66 EUR

The LZ-1S is a passive device and allows to distribute the power supply.

The housing of the LZ-1S has been prepared for mounting with screws to a wall or with a tie to a mast (tie, screws - not included). For the greater amount of devices than 5, the devices can be connected in parallel on the same terminal. You should remember then about distributor max. load current parameter.

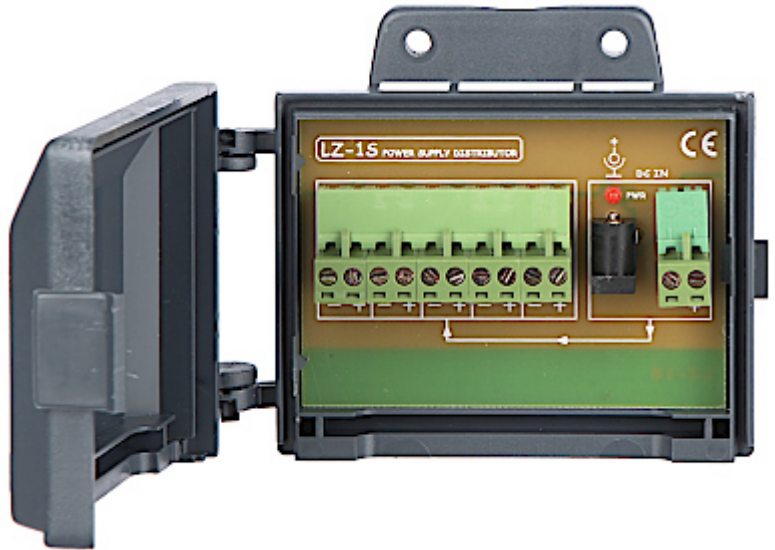

SPECIFICATION

Number of power inputs:	2
Number of power outputs:	5
Maximal power voltage:	0 ... 24 V DC (typical 12V)
Maximal power supply current:	<ul style="list-style-type: none">• 6 A terminals• 4 A 5.5/2.1 socket
Max. output current for single output:	6 A
Protection type:	—
Power connectors type:	Input : socket 2.1/5.5 mm / cable terminal (separable) Output : Cable terminals (separable)
Operation temp:	-50 °C ... 55 °C
Permissible relative humidity:	< 95 %
Dimensions:	120 x 91 x 37 mm
Weight:	0.097 kg
Manufacturer / Brand:	DELTA
Guarantee:	3 years


PRESENTATION

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Internal view, after remove the cover:



All cable terminals are separable, it allows to easy and quick connect or disconnect the power:

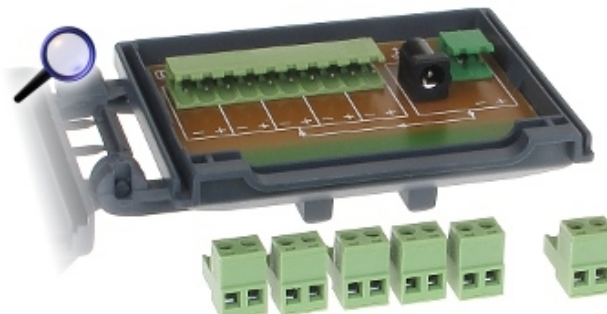

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

The distributor's housing can be easily installed to the walls using the screws and to the masts with a tie:

