

Code: AWZ-536


POWER SUPPLY DISTRIBUTOR AWZ-536

Net: 28.39 EUR Gross: 28.39 EUR

The AWZ-536 is designed to power distribution from one higher power unit.

An unquestionable advantage of employing the AWZ-536 in monitoring systems powered from a central point is additional tamper protection. Without individual protection for each power line, an intruder can stop powering of the whole system just by shorting out the power line of the single camera.

When one of the output is fault, the AW output and LAW LED are on. AW output can be used to remote control of the LB5/AW state, for example external optical signaling.

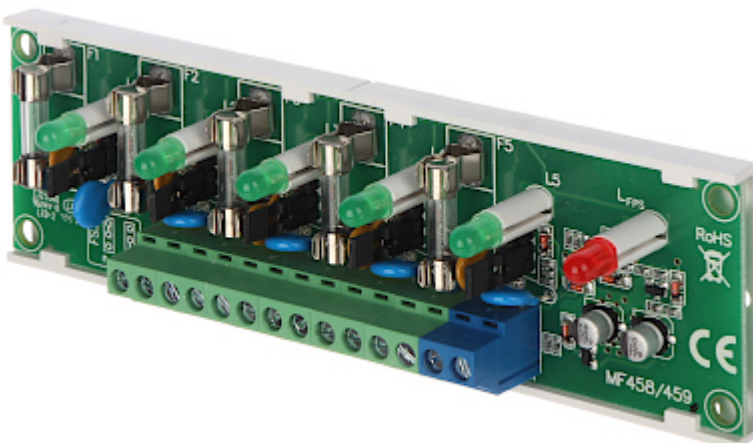

SPECIFICATION

Number of power inputs:	1
Number of power outputs:	5
Maximal power voltage:	10 ... 30 V DC (typical 12V) 10 ... 24 V AC
Maximal power supply current:	5 A Cable terminals
Max. output current for single output:	1 A
Protection type:	5 x 1 A 5/20mm delayed fuse
Power connectors type:	Input : Cable terminals Output : Cable terminals
Operation temp:	-10 °C ... 50 °C
Permissible relative humidity:	< 95 %
Main features:	AW output (fault) - OC type 50mA, LED indication of at least one output fault
Dimensions:	140 x 43 x 29 mm
Weight:	0.07 kg
Manufacturer / Brand:	PULSAR
Guarantee:	2 years

PRESENTATION

Top view:



Mounting side view:

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

