

Code: LZ-12C/R19

## POWER SUPPLY DISTRIBUTOR LZ-12C/R19

Net: 92.00 PLN Gross: 113.16 PLN

The LZ-12C/R19 is a passive device that enables power ordered distribution from one or several higher power units.  
If necessary the terminals can be connected in parallel.



### SPECIFICATION

Number of power outputs:	12 (2 x 6 outputs)
Number of power inputs:	2 (one per each 6-outputs terminal)
Maximal power voltage:	24 V DC (typical 12V)
Maximal power supply current:	5 A (for single terminal)
Max. output current for single output:	1 A
Protection type:	12 x 1 A 5/20mm delayed fuse
Power connectors type:	Input : Cable terminals Output : Cable terminals
Operation temp:	-50 °C ... 55 °C
Permissible relative humidity:	< 95 %
Housing type:	RACK 19", 1U
Weight:	0.34 kg
Dimensions:	482 x 45 x 64 mm
Manufacturer / Brand:	DELTA
Guarantee:	<b>3 years</b>


### PRESENTATION

Front panel:




Rear view:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

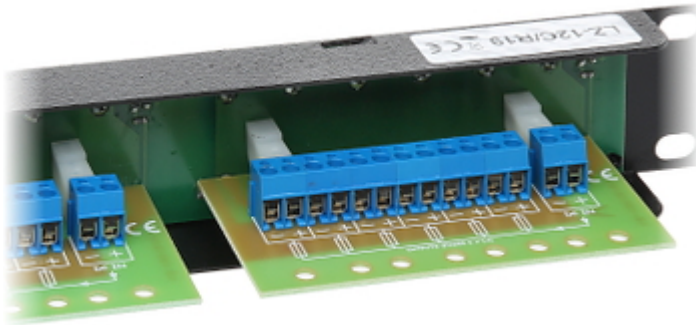


Top view:



Method of mounting:

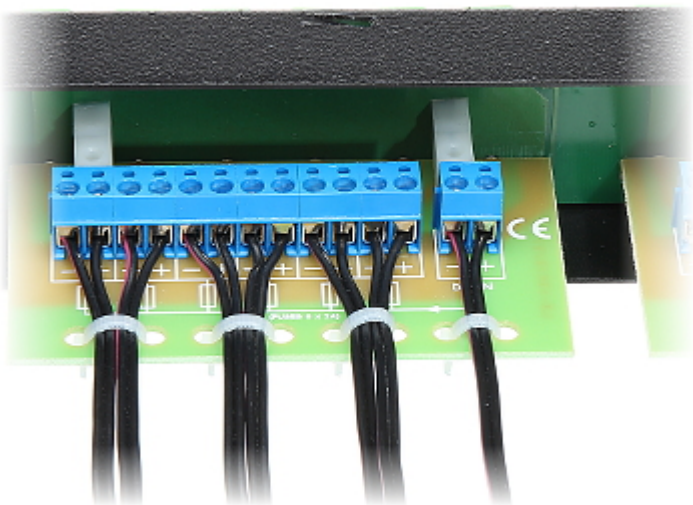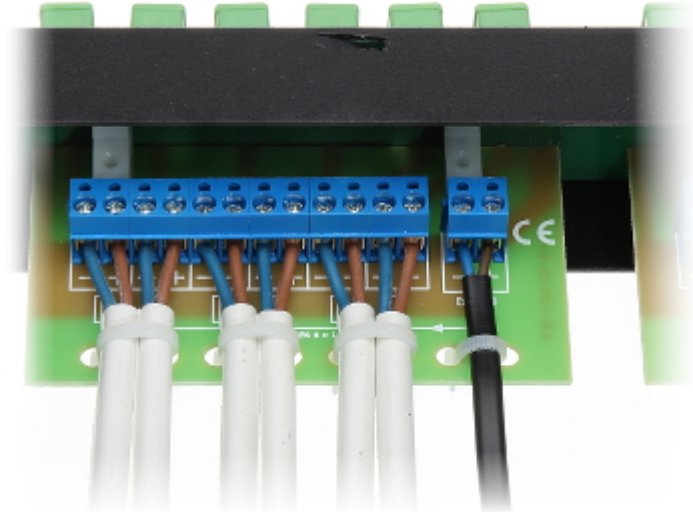

Schematic diagram of distributor application with two different voltages option:

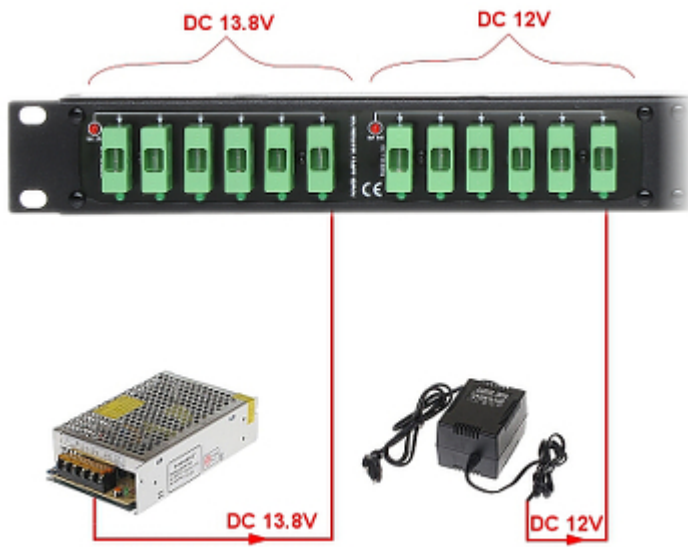

**PACKAGE**

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

