

Code: GEMINI-622D-13

IP CAMERA **GEMINI-622D-13** - 1080p 2.8 ... 12 mm

Net: **103.72 EUR** Gross: **103.72 EUR**

IP camera with efficient H.264 image compression algorithm for clear and smooth video streaming at maximal resolution of 1080p (2.4 MPx). Very easy operation by Internet Explorer browser allows the users to convenient and remote support, and also remote management of the camera. Included camera software enables management and integrated monitoring of many network cameras. Its using allows to create large surveillance system.

ICR - The movable IR filter allows to perfect colors reproduction in daylight and wide gray-scale with high sharpness of the image at night mode.

ATTENTION! For a few models of IP cameras working at $\geq 1920 \times 1080$ resolution we recommend to use of network with 1Gb/s bandwidth.



SPECIFICATION

Standard:	TCP/IP
Sensor:	1/2.8 " Sony CMOS
Matrix size:	2.43 Mpx
Resolution:	1920 x 1080 - 1080p 1280 x 720 - 720p 960 x 544
Lens:	2.8 ... 12 mm, 3 Mpx (Auto-Iris DC)
View angle:	90 ° ... 26 °
S/N ratio:	> 50 dB
Range of IR illumination:	15 m
Memory card slot:	—
Image compression method:	H.264
Alarm inputs / outputs:	—
Bitrate:	16 ... 8000 kbps
Main stream frame rate:	max. 25 fps - 1080p
Network interface:	10/100 Base-T (RJ-45)
Network protocols:	TCP/IP, UDP, HTTP, DHCP, RTP/RTSP, DNS, DDNS, NTP, PPPOE, UPNP, SNMP, ONVIF
Audio:	—
WEB Server:	Built-in
Max. number of on-line users:	10
ONVIF:	2.0 - port 8000
RS-485 interface:	—
Mobile phones support:	Available applications for mobile systems: iPhone, Android, Windows Mobile, Blackberry, Symbian Meye application - mobile port 5053

Application:	The camera is designed for indoor use, due to the possibility of steam condensation.
Main features:	• Possibility to change the resolution, quality and bit rate • Time mark and image description • Image rotation and mirror • Configurable: brightness, contrast, saturation • Privacy zones • DNR - Digital Noise Reduction • WDR - Wide Dynamic Range • Sharpness - sharper image outlines • Day/Night mode - configurable • Possibility to add different privileges to the users
Vandal-proof:	—
Power supply:	12 V DC / 0.31 A
Housing:	Dome - Plastic
Color:	White
"Index of Protection":	IP55
Operation temp:	0 °C ... 60 °C
Weight:	0.42 kg
Dimensions:	Ø 136 x 117 mm
Supported languages:	Chinese Simplified, English
Manufacturer / Brand:	GEMINI
Guarantee:	2 years

PRESENTATION


Camera view after remove the Dome cover - camera lens adjustment knobs are visible:



Mounting side view:



See how you can power the camera in PoE standard:

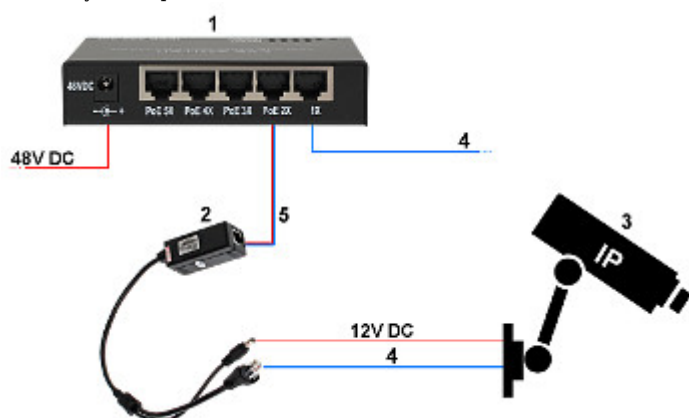

1. SWITCH PoE
 2. POE-802.3AF/C
 3. IP Camera
 4. Ethernet
 5. Ethernet + PoE
- In the kit:



OUR TESTS


Camera image at artificial illumination (about 30Lux):



Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:

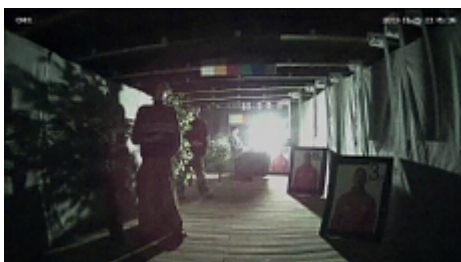

OUR OPINIONS



- Very well working motion detection with FLEX IP, BCS IP DVR models cooperation.

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60