

Code: POE-802.3AF

STABILIZER 48V/12V **POE-802.3AF**

Net: **14.65 EUR** Gross: **18.02 EUR**



The POE-802.3AF allows to supply the devices with DC 12V.

SPECIFICATION

Standards:	PoE (802.3af), PoE (802.3at)
Input socket:	RJ-45 (T568B, T568A)
Number of inputs:	1 x RJ-45 socket - PoE
Number of outputs:	1 x RJ-45 plug 1 x 2.1/5.5 mm plug on the cable
Input voltage:	44 - 57 V PoE
Output voltage:	12 V DC +/- 5%
Output current:	max. 1A / 12V DC @ 48 V PoE max. 0,8A / 12V DC @ 57 V PoE
Supported data rates:	<ul style="list-style-type: none">Ethernet - 10 Mbps Half DuplexFast Ethernet - 100 Mbps Full Duplex
Maximal transmission range:	100 m (DATA)
Certificates:	CE, FCC Class B
Weight:	0.04 kg
Dimensions:	78 x 20 x 20 mm
Guarantee:	2 years

PRESENTATION


Connectors:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



See how you can power the camera in PoE standard:

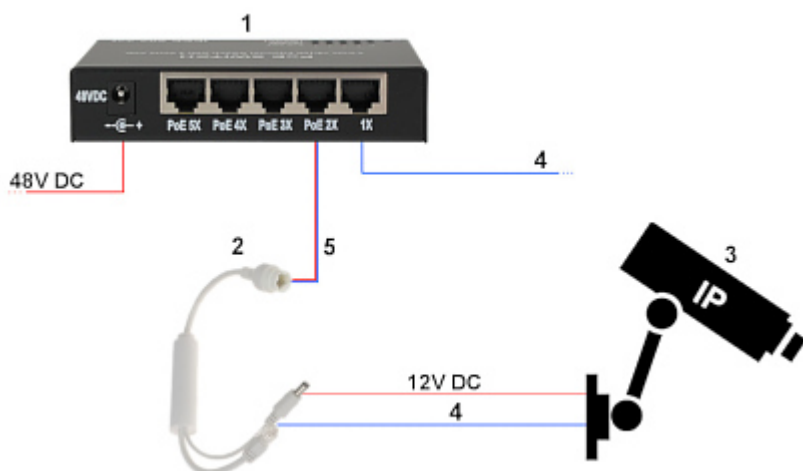

- 1. SWITCH PoE
- 2. POE-802.3AF/C
- 3. IP Camera

- 4. Ethernet
- 5. Ethernet + PoE

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

