

Code: POE-802.3AT/24

STABILIZER 48V/12V **POE-802.3AT/24**

Net: **13.49 EUR** Gross: **13.49 EUR**



The POE-802.3AT/24 allows to supply the devices with DC 12V.

Attention! If the power adaptor is using for continuous work (24H) the rated current of the adaptor should be less than 80% of the maximal current.

Please pay attention for proper cooling conditions of the power adaptor during work!

SPECIFICATION

Standards:	PoE (802.3af), PoE (802.3at)
Input socket:	RJ-45
Number of inputs:	1 x RJ-45 socket - PoE
Number of outputs:	1 x RJ-45 plug - on the cable 1 x 2.1/5.5 mm plug on the cable
Input voltage:	44 - 57 V PoE
Output voltage:	12 V DC +/- 10%
Output current:	<ul style="list-style-type: none">• 1.6 A (continuous operation)• 2 A (instantaneous operation)
Supported data rates:	<ul style="list-style-type: none">• Ethernet - 10 Mbps Half Duplex• Fast Ethernet - 100 Mbps Full Duplex
Maximal transmission range:	100 m (DATA)
LEDs application:	Power supply PoE - Yellow
Certificates:	CE
Weight:	0.068 kg
Dimensions:	94 x 35 x 27 mm
Guarantee:	2 years

PRESENTATION


Connectors:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



See how you can power the camera in PoE standard:

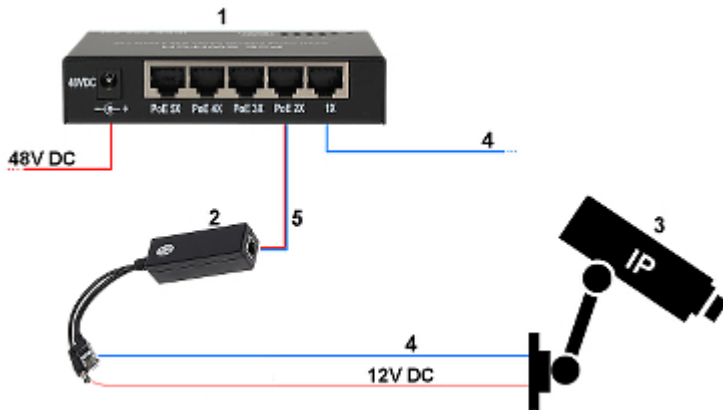

1. SWITCH PoE
2. STABILIZER POE-802.3AF/C 48V/12V
3. IP Camera
4. Ethernet
5. Ethernet + PoE

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------