

Code: OR-PI-456/24UC

RELAY OR-PI-456/24UC ORNO

Net: 21.11 EUR Gross: 21.11 EUR

It can be used to increase maximal load of controller transistor output line and for galvanic isolation between output line and load point.



SPECIFICATION

Number of relay outputs:	1
Power supply:	24 V DC / AC
Current consumption:	33 mA @ 24 V
Relay maximal load:	16 A / 250 V AC (max) 16 A / 24 V DC (max)
Output:	1 x NO/NC
Main features:	• DIN, TS-35 rail mounting • LED indication • Bistable operation controlled by the S control input
Operation temp:	-20 °C ... 50 °C
Weight:	0.065 kg
Dimensions:	97 x 17 x 65 mm
Manufacturer / Brand:	ORNO
Guarantee:	2 years

PRESENTATION

Front view:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60




Connectors:






Side view:

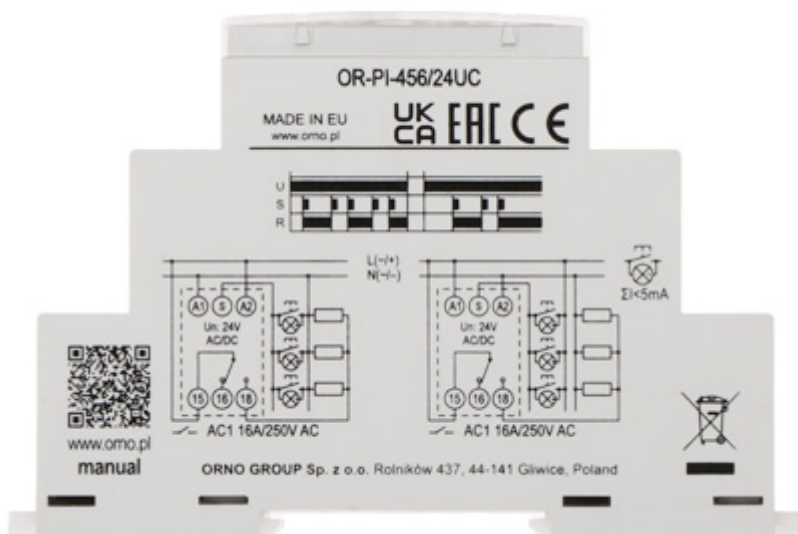

Mounting side view:

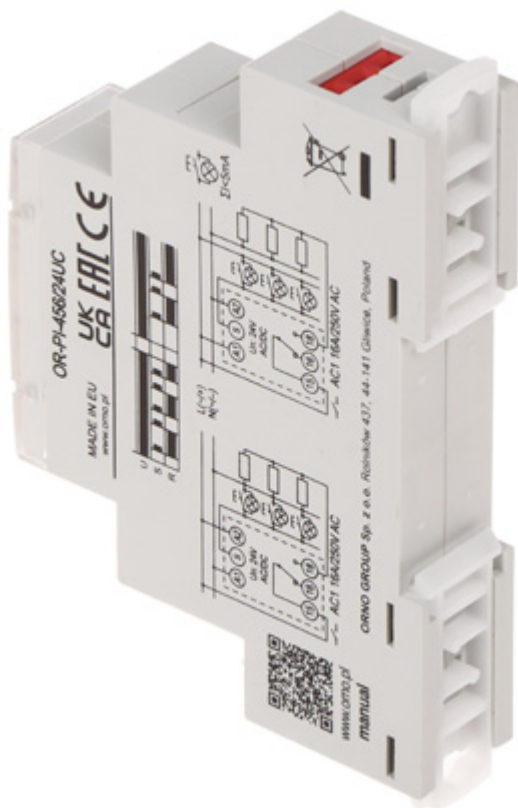

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------