


Code: PK4-24-ZD

NORMALLY OPEN RELAY MODULE **PK4-24-ZD** DELTA

Net: **20.38 EUR** Gross: **25.07 EUR**

It can be used to increase maximal load of controller transistor output line and for galvanic isolation between output line and load point.

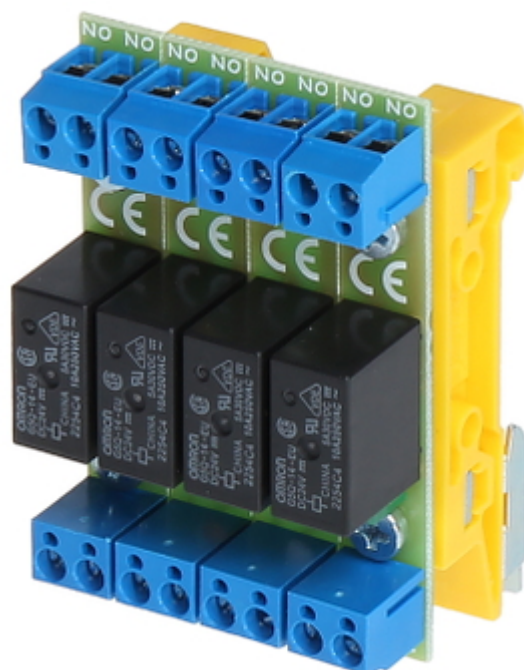


SPECIFICATION

Number of relay outputs:	4
Power supply:	24 ... 45 V DC
Current consumption:	17 mA 24 V DC
Relay maximal load:	5 A (max), 30 V DC / 50 V AC (max)
Output:	NO
Application:	relay for electromagnetic lock/electric strike
Main features:	<ul style="list-style-type: none">• DIN, TS-35 rail mounting,• LED indication,• Protections : Overvoltage, Reverse polarity connection
Operation temp:	-40 °C ... 85 °C
Weight:	0.08 kg
Dimensions:	72 x 44 x 40 mm
Manufacturer / Brand:	DELTA
Guarantee:	3 years


PRESENTATION


Top view:

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

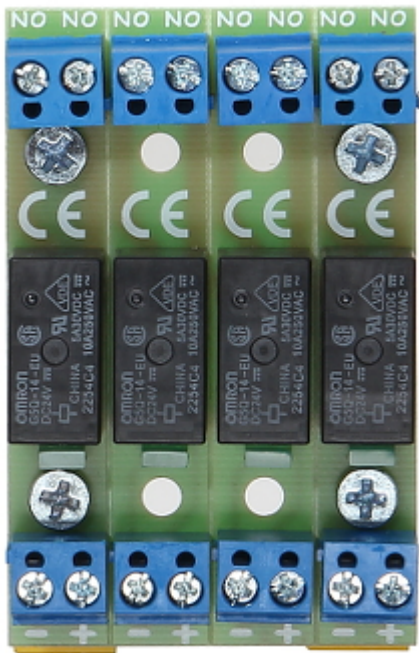


Connectors:

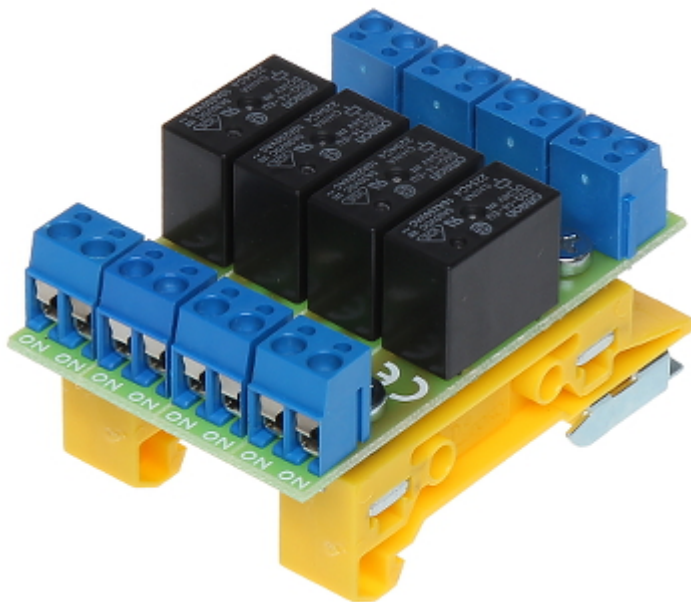


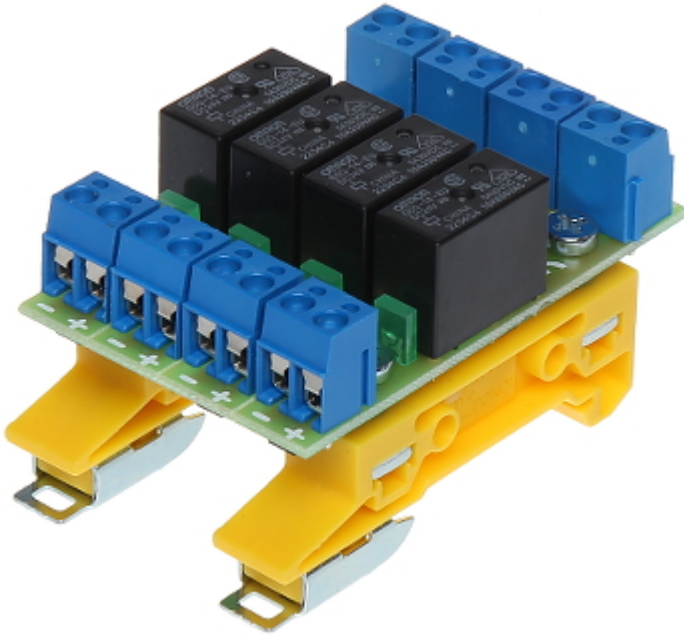

Mounting side view:

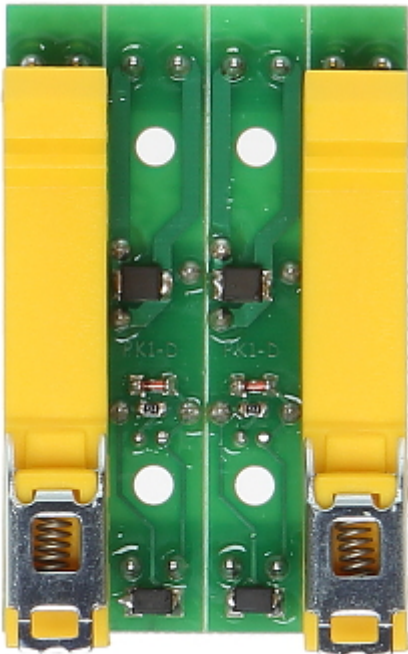

Schematic diagram:

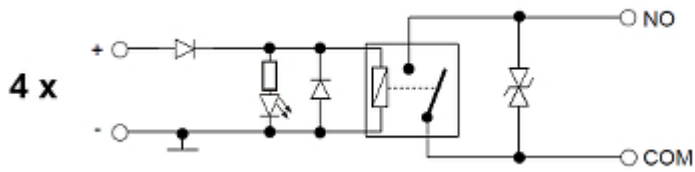

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

