

Code: PK4-24-ZN/S

NORMALLY OPEN RELAY MODULE **PK4-24-ZN/S**

Net: **11.22 EUR** Gross: **11.22 EUR**

It can be used to increase maximal load of controller transistor output line and for galvanic isolation between output line and load point.



SPECIFICATION

Number of relay outputs:	4
Power supply:	• 24 V DC - Nominal voltage • 45 V DC - Maximal voltage
Current consumption:	17 mA per each relay at voltage 24 V DC
Relay maximal load:	5 A (max), 30 V DC / 50 V AC (max)
Output:	4 x NO
Application:	relay for electromagnetic lock/electric strike
Main features:	• Mounting with self-adhesive bases, • Screw mounting with spacers, • LED indication, • Protections : Overvoltage, Reverse polarity connection
Operation temp:	-40 °C ... 85 °C
Weight:	0.055 kg
Dimensions:	69 x 44 x 20 mm
Manufacturer / Brand:	DELTA
Guarantee:	3 years



PRESENTATION

Top view:

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60




Connectors:

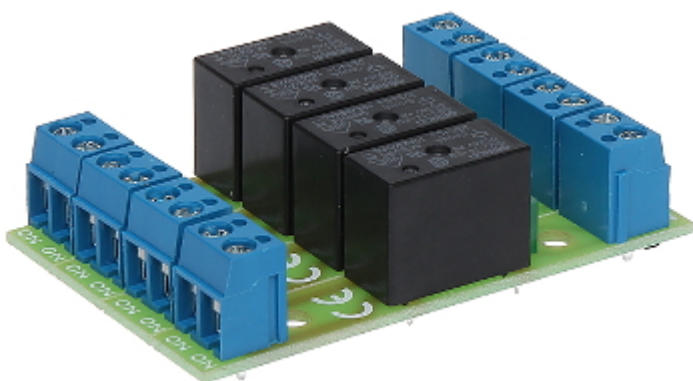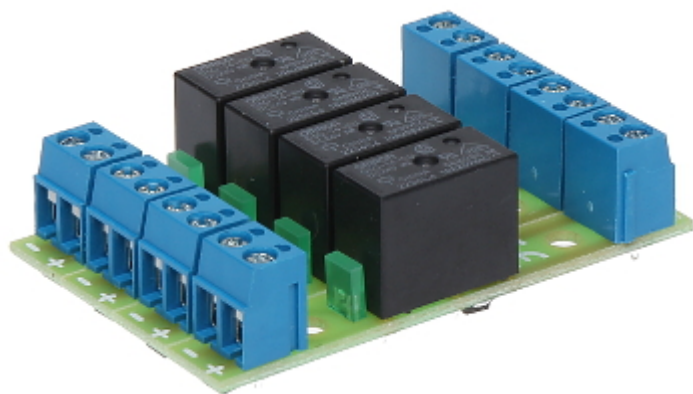

In the kit:



Schematic diagram:

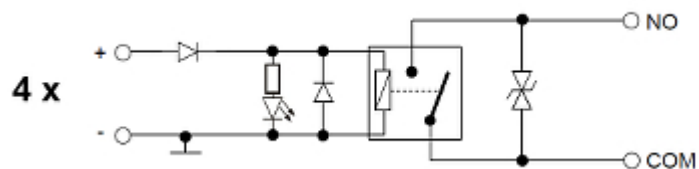

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60