Code: ME-2-D

ENCLOSURE WITH BUFFERED POWER SUPPLY UNIT **ME-2-D** ROGER

Net: 107.28 EUR Gross: 107.28 EUR

Metal enclosure with 13.8VDC/3.5A buffered switch mode power supply unit, and 3 mounting rails DIN 35mm adapted to mount different devices and electronic modules of RACS systems.

SPECIFICATION

Power voltage:	230 V AC / 50 Hz
Output voltage:	13.8 V DC / 3.5 A
Output power:	48 VA
Battery charging current:	0.5 A
Tamper contact:	30 V DC / 0.5 A
Main features:	• The PSBOC501235 buffered power supply unit and the AWZ536 fuse module included in the kit • Built-in buffered power supply unit with battery and AC mains monitoring • Tamper protections • Fuse block for power distribution, 5 power outputs protected independently with 0.5A or 1.0A fuses • 3x DIN 35mm mounting rail with 277mm length • Place for battery - 12 V / 17 Ah
Operation temp:	-10 °C ... 40 °C
Permissible relative humidity:	10 % ... 90 % (non-condensing)
Weight:	3.8 kg
Dimensions:	403 x 326 x 130 mm
Manufacturer / Brand:	ROGER
Guarantee:	**3 years**

PRESENTATION

DELTA-OPTI Monika Matysiak; https://www.delta.poznan.pl
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Front view:

Rear view:

Side view:

The PSBOC501235 buffered power supply unit and the AWZ536 fuse module included in the kit:

Power distributor:

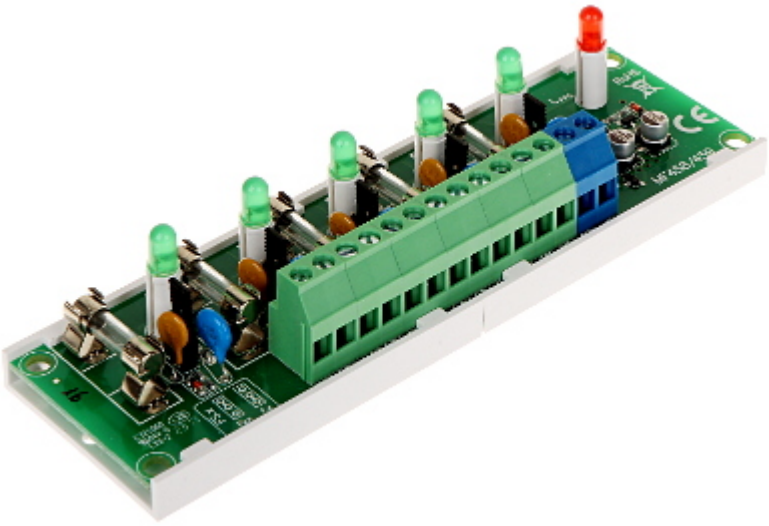

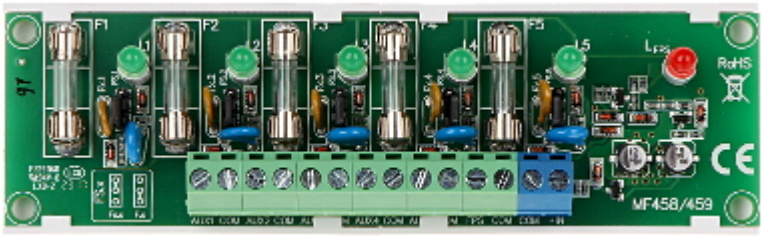

Power adapter:

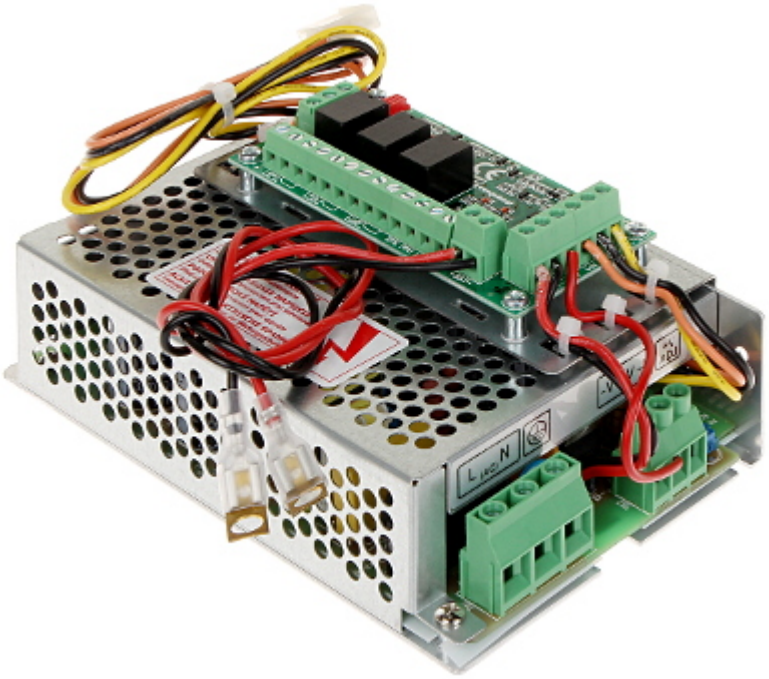

DELTA-OPTI Monika Matysiak; https://www.delta.poznan.pl
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

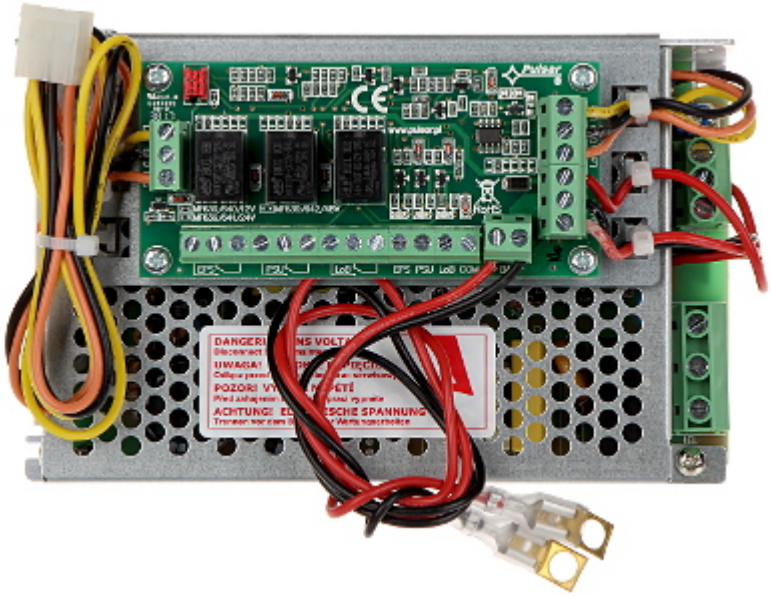

Example of application:

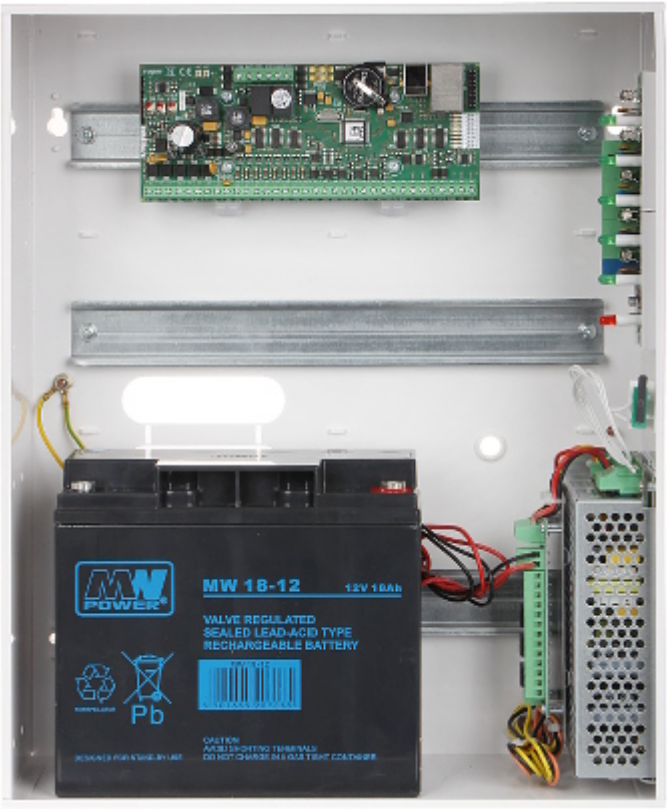

In the kit:

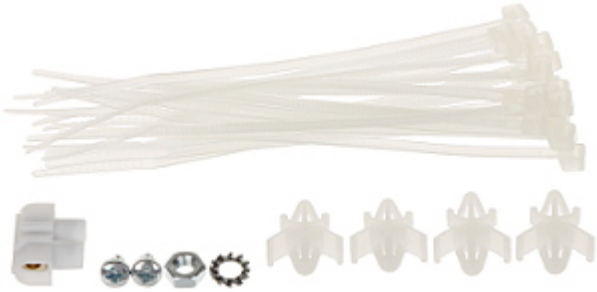

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg

DELTA-OPTI Monika Matysiak; https://www.delta.poznan.pl
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60