


Code: ZBF-12V/10A

# BUFFERED SWITCHING POWER SUPPLY ADAPTER **ZBF-12V/10A**

Net: **90.66 EUR** Gross: **111.51 EUR**

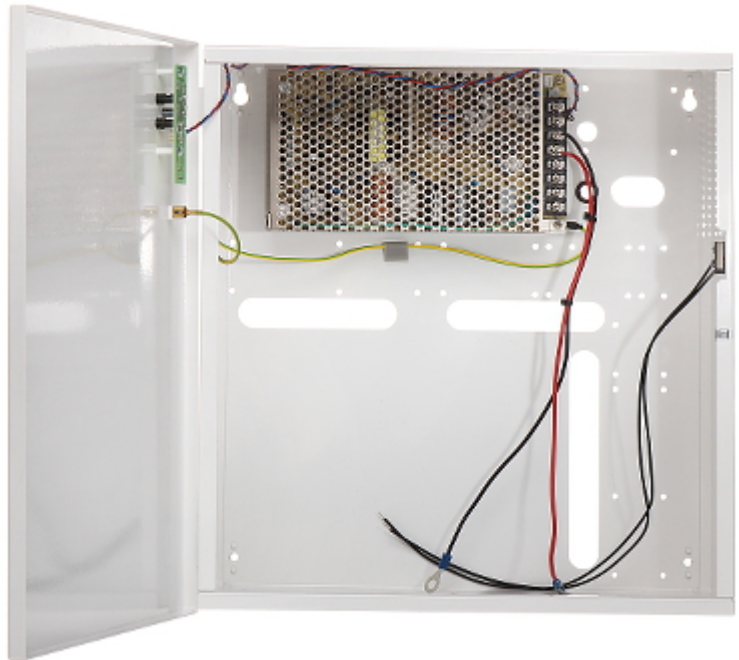

The buffered power supply adapter is designed to powering control panels, sensors, code locks, cameras, consoles, intercoms and other alarm system equipment.

Attention! If the power adaptor is using for continuous work (24H) the rated current of the adaptor should be less than 80% of the maximal current.

## SPECIFICATION

Adapter type:	Switching
Input voltage:	85 ... 264 V AC
Output voltage:	<ul style="list-style-type: none"><li>• 13.8 V DC (mains mode)</li><li>• 10.5 ... 13.8 V DC (battery mode)</li></ul>
Max. output current (total):	10 A
Power:	151 W
Battery charging current:	4 A
Protections:	<ul style="list-style-type: none"><li>• Short-circuit</li><li>• Overload</li><li>• Overvoltage</li><li>• Discharge</li></ul>
Adapter operation control:	<ul style="list-style-type: none"><li>• AC input voltage presence indication</li><li>• DC output voltage presence indication</li></ul>
Place for battery:	12V/33Ah, 12V/40Ah
Max. battery dimensions:	370 x 230 x 170 mm
Weight:	3.9 kg
Dimensions:	330 x 350 x 175 mm
Guarantee:	2 years

## PRESENTATION

Internal view:

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60



Front view:



Rear view:





DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60