


Code: PSUPS-20A12E

BUFFERED SWITCHING POWER SUPPLY ADAPTER **PSUPS-20A12E**

Net: **228.72 EUR** Gross: **281.33 EUR**

The buffered power supply adapter is designed for powering 16 cameras and recorder.
Please pay attention for proper cooling conditions of the power adaptor during work!

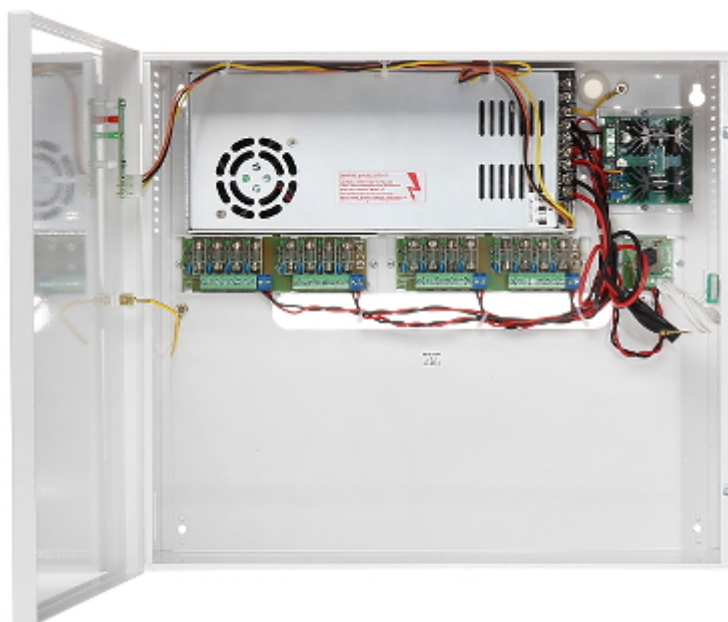

SPECIFICATION


Adapter type:	Switching
Input voltage:	176 V ... 264 V AC
Output voltage:	11 V ... 13.8 V DC (buffer operation) - to cameras powering 11 V ... 12 V DC (buffer operation) - to recorder powering
Max. output current (total):	20 A (max)
Battery charging current:	2 A / 4 A / 8 A
Current consumption in waiting mode:	116.8 mA (without battery)
Power:	300 W
Number of outputs:	16 x terminals to cameras powering (12V/1A) + 1 to recorder powering (12V/5A)
Main features:	<ul style="list-style-type: none">• Built-in power factor correction system (PFC)• Battery charge and maintenance control• Battery output protection against short circuit and reverse polarity connection• 16 outputs protected by glass fuses• Fuse has gone indication• LED indication
Protections:	<ul style="list-style-type: none">• Short-circuit• Overload• Overvoltage• Overvoltage• Overheat• Tamper• Reverse polarity connection• Discharge• Overcharge
Adapter operation control:	<ul style="list-style-type: none">• AC input voltage presence indication AC• DC output voltage presence indication DC
Place for battery:	12V/65Ah
Max. battery dimensions:	360 x 175 x 165 mm

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Supported norms:	IP20 class I
Operation temp. / Relative humidity:	-10 ... 40 °C / 20 ... 90 %
Weight:	7.1 kg
Dimensions:	400 x 350 x 178 mm
Manufacturer / Brand:	PULSAR
Guarantee:	2 years

PRESENTATION

Internal view:

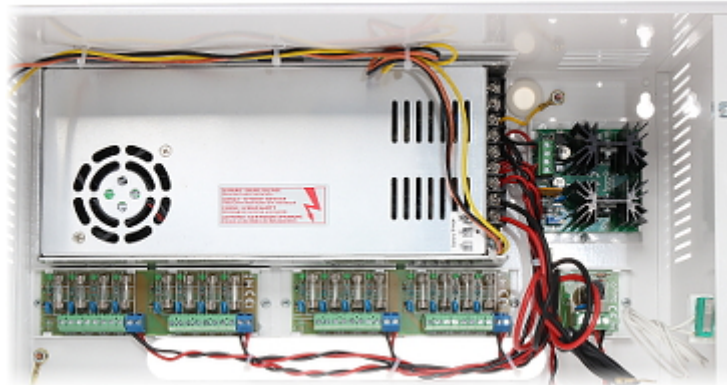

Front view:



Mounting side view:



Dimensions:

