

Code: DL2-150-24-U

## SWITCHING ADAPTER **DL2-150-24-U**

Net: **42.58 EUR** Gross: **42.58 EUR**

Switching adapter installed on the TS35/7.5 or 15 DIN rail, resistant to high operation temperatures (up to 70°C).



### SPECIFICATION


|                                      |                                                                                                                                |
|--------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|
| Adapter type:                        | Switching                                                                                                                      |
| Power voltage:                       | <ul style="list-style-type: none"><li>• 85 ... 264 V AC</li><li>• 120 ... 370 V DC</li></ul>                                   |
| Output voltage:                      | 24 V DC                                                                                                                        |
| Output voltage adjustment:           | 21.6 ... 29 V DC                                                                                                               |
| Maximal load:                        | <ul style="list-style-type: none"><li>• 5.31 A @ 100 ... 120 V AC,</li><li>• 6.25 A @ 200 ... 240 V AC</li></ul>               |
| Output power:                        | <ul style="list-style-type: none"><li>• 127 W @ 100 ... 120 V AC,</li><li>• 150 W @ 200 ... 240 V AC</li></ul>                 |
| Number of outputs:                   | 2 pcs                                                                                                                          |
| Efficiency:                          | 91.5 %                                                                                                                         |
| Housing type:                        | DIN                                                                                                                            |
| Protections:                         | <ul style="list-style-type: none"><li>• Short-circuit</li><li>• Overload</li><li>• Overvoltage</li><li>• Temperature</li></ul> |
| Operation temp. / Relative humidity: | -30 °C ... 70 °C / 10 ... 95 %                                                                                                 |
| Weight:                              | 0.33 kg                                                                                                                        |
| Dimensions:                          | 105 x 90 x 58 mm                                                                                                               |
| Guarantee:                           | <b>3 years</b>                                                                                                                 |

### PRESENTATION



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60

Adapter connectors:

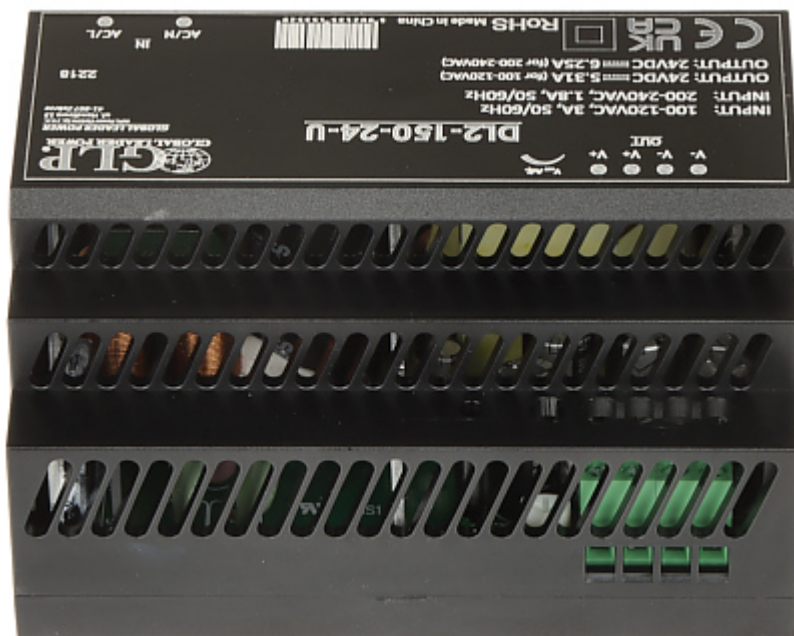

Top view:




Rear panel (DIN rail installation):





Dimensions:

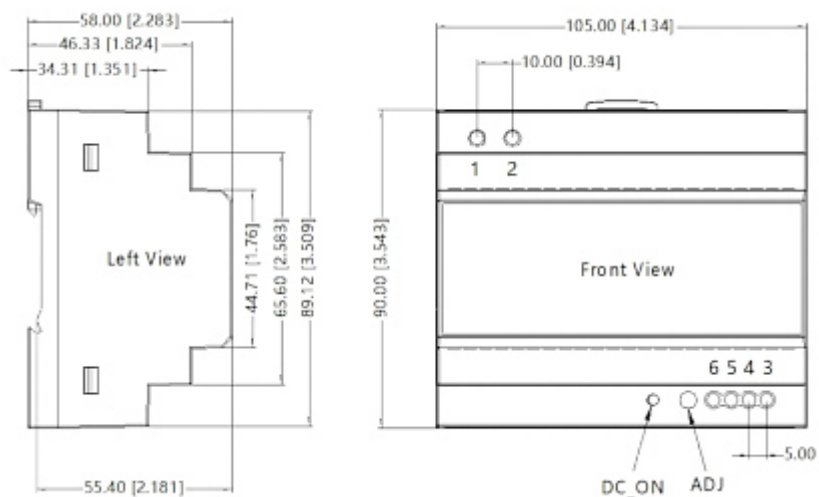

PACKAGE

|                                  |                    |
|----------------------------------|--------------------|
| Dimensions (L x W x H): 0x0x0 mm | Gross Weight: 0 kg |
|----------------------------------|--------------------|