

Code: DRL-24V480W-1EN

SWITCHING ADAPTER **DRL-24V480W-1EN**

Net: **136.25 EUR** Gross: **167.59 EUR**



Switching adapter installed on the TS35/7.5 or 15 DIN rail, resistant to high operation temperatures (up to 70°C).

SPECIFICATION

Adapter type:	Switching
Power voltage:	90 ... 264 V AC
Output voltage:	24 V DC
Output voltage adjustment:	24 ... 28 V
Voltage tolerance:	± 1 %
Maximal load:	20 A
Output power:	480 W
Number of outputs:	2 pcs
Efficiency:	93 %
Housing type:	DIN
MTBF (Mean Time Between Faults):	700 000 hours
Vibration resistance:	IEC60068-2-6, 10 ... 500 Hz max. 3 G for 60 minutes
Protections:	<ul style="list-style-type: none">• Short-circuit• Overvoltage• Temperature• Overload protection
Operation temp. / Relative humidity:	-30 °C ... 70 °C / 20 % ... 90 %
Weight:	0.87 kg
Dimensions:	56 x 123.4 x 123.6 mm

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Guarantee:

5 years

PRESENTATION

Front panel:



Connectors:






Rear panel (DIN rail installation):





Dimensions:

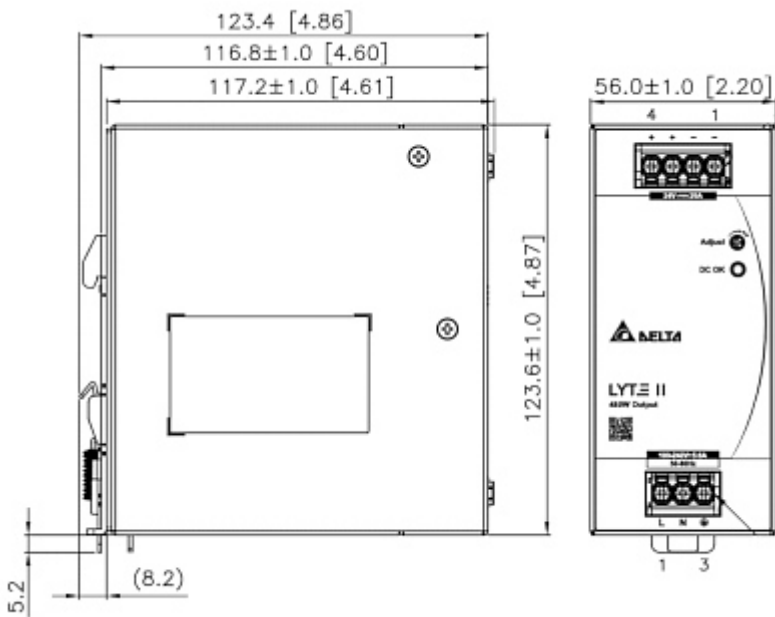

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------