

Code: DRC-24V100W-1AZ

## SWITCHING ADAPTER **DRC-24V100W-1AZ**

Net: **45.84 EUR** Gross: **56.38 EUR**

Switching adapter installed on the TS35/7.5 or 15 DIN rail, resistant to high operation temperatures (up to 70°C).



### SPECIFICATION

Adapter type:	Switching
Power voltage:	90 ... 264 V AC
Output voltage:	24 V DC
Output voltage adjustment:	20.0 ... 24.48 V
Maximal load:	3.8 A
Output power:	91.2 W
Number of outputs:	2 pcs
Efficiency:	> 87 %
Housing type:	DIN
Vibration resistance:	✓
Protections:	<ul style="list-style-type: none"><li>• Short-circuit</li><li>• Overload</li><li>• Overvoltage</li></ul>
Operation temp. / Relative humidity:	-25 °C ... 71 °C / 5 ... 95 %
Weight:	0.345 kg
Dimensions:	90 x 91 x 56 mm
Guarantee:	<b>5 years</b>



### PRESENTATION

Top view:

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60




Adapter connectors:

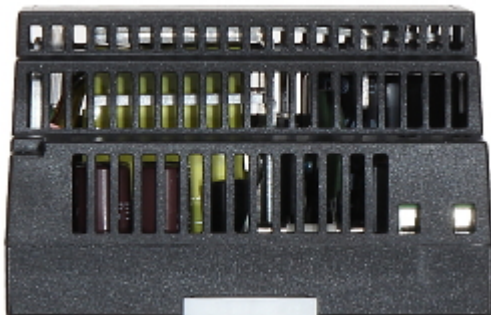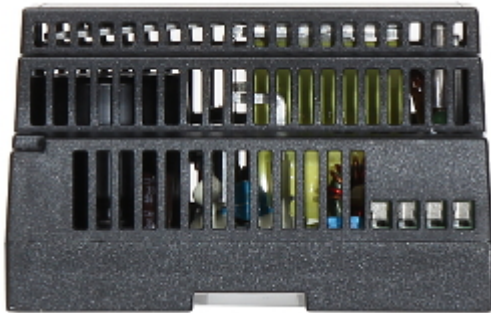


Rear panel (DIN rail installation):



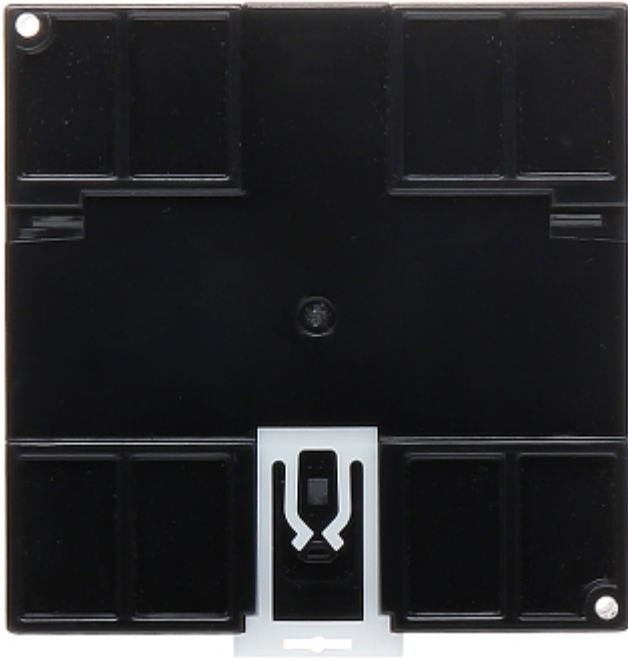

Dimensions:

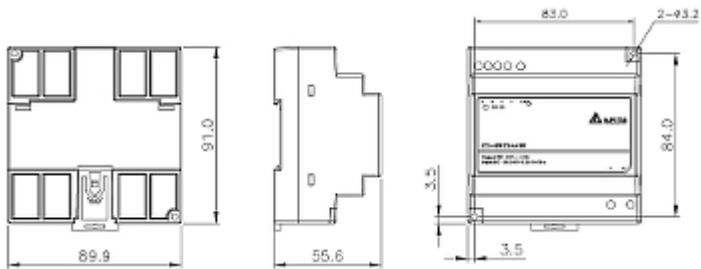

## PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

