

Code: DRP-024V060W-1BN

SWITCHING ADAPTER **DRP-024V060W-1BN**

Net: **46.16 EUR** Gross: **56.78 EUR**



Switching adapter installed on the TS35/7.5 or 15 DIN rail, resistant to high operation temperatures (up to 70°C).

SPECIFICATION

Adapter type:	Switching
Power voltage:	86 ... 264 V AC
Output voltage:	24 V DC
Output voltage adjustment:	24 ... 28 V
Voltage tolerance:	± 2 %
Maximal load:	2.5 A
Output power:	60 W
Number of outputs:	1 pcs
Efficiency:	86 %
Housing type:	DIN
MTBF (Mean Time Between Faults):	1000000 hours
Vibration resistance:	IEC60068-2-6, 10 ... 150 Hz max. 3 G for 60 minutes
Protections:	<ul style="list-style-type: none">• Short-circuit• Overvoltage• Overload protection
Operation temp. / Relative humidity:	-20 °C ... 75 °C / < 95 %
Weight:	0.37 kg
Dimensions:	32 x 121 x 125 mm
Guarantee:	5 years

PRESENTATION

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60


Front panel:



Rear panel (DIN rail installation):



Side view:

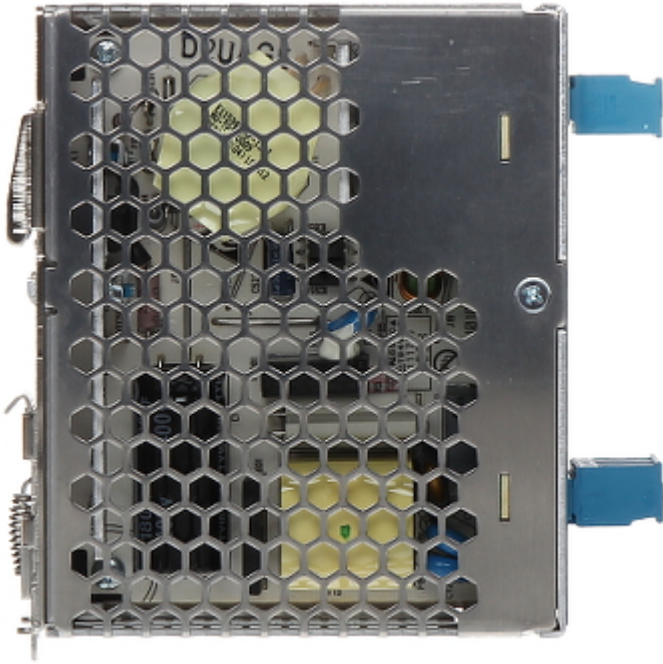

All cable terminals are separable, it allows to easy and quick connect or disconnect the power:



Dimensions:

