

Code: DRP-024V120W-1BN

## SWITCHING ADAPTER **DRP-024V120W-1BN**

Net: **310.80 PLN** Gross: **382.28 PLN**

Switching adapter installed on the TS35/7.5 or 15 DIN rail, resistant to high operation temperatures (up to 70°C).



### SPECIFICATION

Adapter type:	Switching
Power voltage:	86 ... 264 V AC
Output voltage:	24 V DC
Output voltage adjustment:	24 ... 28 V
Voltage tolerance:	± 2 %
Maximal load:	5 A
Output power:	120 W
Number of outputs:	2 pcs
Efficiency:	> 90 %
Housing type:	DIN
MTBF (Mean Time Between Faults):	800000 hours
Vibration resistance:	IEC60068-2-6, 10 ... 150 Hz max. 3 G for 60 minutes
Protections:	<ul style="list-style-type: none"><li>• Short-circuit</li><li>• Overvoltage</li><li>• Overload protection</li></ul>
Operation temp. / Relative humidity:	-20 °C ... 85 °C / < 95 %
Weight:	0.72 kg
Dimensions:	50 x 121 x 123 mm
Guarantee:	<b>5 years</b>

### PRESENTATION

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60


Front panel:



Rear panel (DIN rail installation):



Side view:

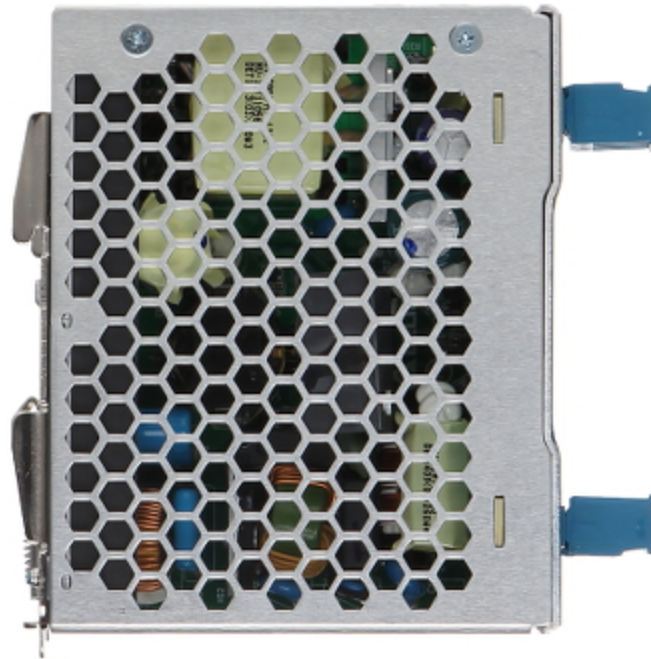

All cable terminals are separable, it allows to easy and quick connect or disconnect the power:



Dimensions:

