

Code: DINB-27630

## BUFFERED SWITCHING POWER SUPPLY ADAPTER **DINB-27630**

Net: **43.22 EUR** Gross: **53.16 EUR**

Buffered power adapter with DIN montage casing designed to systems supplied by 24V voltage. DINB-27630 is designed to mount on the DIN 35 mm rail.




### SPECIFICATION

Adapter type:	Switching
Power voltage:	90 ... 264 V AC
Output voltage:	24 V DC
Output voltage adjustment:	<ul style="list-style-type: none"><li>• 23 V ... 27.6 V DC (buffer operation)</li><li>• 20 V ... 27.6 V DC (battery mode)</li></ul>
Maximal load:	<ul style="list-style-type: none"><li>• 3.2 A - Temperature &lt; 30 °C</li><li>• 2.3 A - Temperature = 40 °C</li></ul>
Battery charging current:	0.2 A
Output power:	90 W
Number of outputs:	2 pcs
Protections:	<ul style="list-style-type: none"><li>• Short-circuit</li><li>• Overvoltage</li><li>• Overload</li><li>• Reverse polarity connection</li><li>• Discharge</li></ul>
Adapter operation control:	<ul style="list-style-type: none"><li>• AC input voltage presence indication</li><li>• DC output voltage presence indication</li><li>• Battery charging indication</li></ul>
Housing type:	DIN
Weight:	0.41 kg
Dimensions:	122 x 93 x 50 mm
Manufacturer / Brand:	PULSAR
Guarantee:	2 years

### PRESENTATION

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60

Adapter connectors:

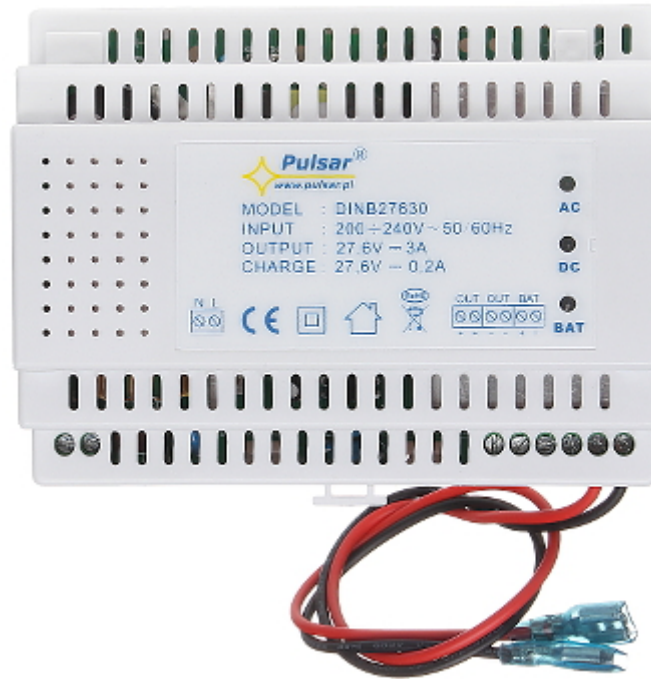

Mounting side view:



Dimensions:

