

Code: DS-2CD2346G2P-ISU/SL(2.8MM)(C)

IP CAMERA **DS-2CD2346G2P-ISU/SL(2.8MM)(C)** PANORAMIC ACUSENSE

- 4 Mpx 2 x 2.8 mm Hikvision

Net: **389.11 EUR** Gross: **389.11 EUR**

IP camera with efficient H.265 / H.264 image compression algorithm for clear and smooth video streaming at maximal resolution of 4 MPx.

PoE powering possibility, compatible with the 802.3af standard makes the device more universal and easier to install.

Powered by Darkfighter - the camera has very good sensitivity, dedicated to poor lighting conditions. Camera is according to IP67 Index of Protection norm.



SPECIFICATION

Standard:	TCP/IP
Sensor:	2 x 1/2.5 " Progressive Scan CMOS
Matrix size:	2 x 2 Mpx - 4 Mpx (total)
Scanning system:	Progressive
Resolution:	3040 x 1368 - 4 Mpx
Lens:	2 x 2.8 mm
View angle:	180 °
Range of IR illumination:	30 m
RS-485 interface:	—
Memory card slot:	Micro SD memory cards up to 256GB support (possible local recording)
Image compression method:	H.265+ / H.265 / H.264+ / H.264 / MJPEG
Alarm inputs / outputs:	1 / 1
Audio:	• Microphone built-in • 1 Audio input • 1 Audio output • Speaker built-in - Alarm siren • Bi-directional audio streaming support
Main stream frame rate:	25 fps @ 4 Mpx
Network interface:	10/100 Base-T (RJ-45)
WEB Server:	Built-in
Max. number of on-line users:	6

ONVIF:	—
Main features:	• Camera from AcuSense series • WDR - 120 dB - Wide Dynamic Range • 3D-DNR - Digital Noise Reduction • BLC/HLC - Back Light / High Light Compensation • ROI - improve the quality of selected parts of image • ANR - Automatic Network Replenishment allows to save image to the card when the network connection with DVR is break (network failure) and next synchronize its • NAS - Network Attached Storage support • Day/night mode • ICR - Movable InfraRed filter • Auto White Balance • AGC - Automatic Gain Control • Possibility to change the resolution, quality and bit rate • Sharpness - sharper image outlines • Mirror - Mirror image • Configurable Privacy Zones • Smart motion detection (with recognizing people and vehicles) • Filtering of false alarms based on the recognition of persons and vehicles • Light and sound alarm, • Intelligent Image Analysis : intrusion, crossing the line (tripwire), detection of entry into the area / exit from the area - classification of people and vehicles, scene changing
Mobile phones support:	Port no.: 8000 or access by a cloud (P2P) • Android: Free application Hik-Connect • iOS: Free application Hik-Connect
Default IP address:	192.168.1.64
Default admin user / password:	admin / - The administrator password should be set at the first start
Web browser access ports:	80
PC client access ports:	Port no.: 8000 or access by a cloud (P2P) - iVMS-4200 application
Mobile client access ports:	8000
Port ONVIF:	80
RTSP URL:	• Main stream rtsp://user:password@192.168.1.64:554/Streaming/Channels/101/ - with authorization • Sub stream rtsp://user:password@192.168.1.64:554/Streaming/Channels/102/ - with authorization
Power supply:	• PoE (802.3af), • 12 V DC / 880 mA
Power consumption:	$\leq 12.5 \text{ W @ PoE (802.3af)}$ $\leq 10.5 \text{ W @ 12 V DC}$
Housing:	Dome, Metal
Color:	White
"Index of Protection":	IP67
Vandal-proof:	—
Operation temp:	-30 °C ... 60 °C
Weight:	0.95 kg
Dimensions:	Ø 140 x 146 mm
Supported languages:	Polish, English, Bulgarian, Croatian, Czech, Danish, Estonian, Finnish, French, Greek, Spanish, Dutch, Lithuanian, Latvian, German, Norwegian, Portuguese, Russian, Romanian, Serbian, Slovak, Slovenian, Swedish, Turkish, Hungarian, Vietnamese, Italian
Manufacturer / Brand:	Hikvision
SAP Code:	311320488
Guarantee:	3 years



PRESENTATION




Rear view:



Memory card slot and "Reset" button:



Mounting side view:

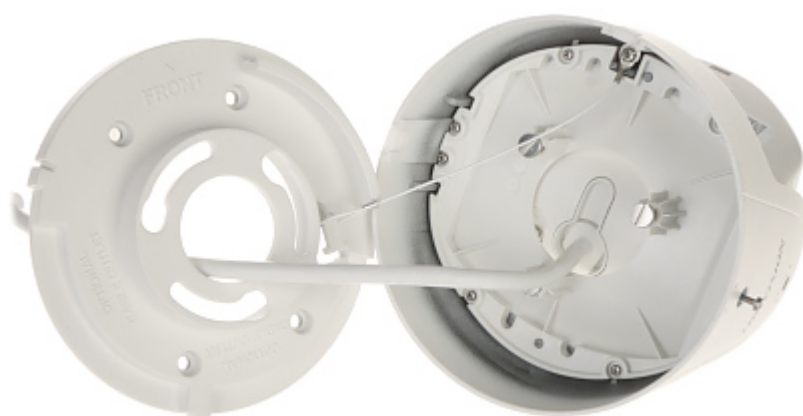

Camera connectors:



In the kit:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

