

Code: GS-133

GAS DETECTOR **GS-133** JABLOTRON

Price visible after login

The GS-133 microprocessor-based digital gas detectors are characterized by reliability and low current consumption. A digital temperature compensation feature allows to operate within a wide temperature range. Gas concentration above the threshold level triggers visual and audible alarm signals. The detectors are intended to be used as part of a security system.



SPECIFICATION

Detection:	<ul style="list-style-type: none">• Flammable gases• Natural gas (methane)• LPG (propane-butane) gas
Alarm signaling:	<ul style="list-style-type: none">• Buzzer• Blinking LED• Relay output
Gas concentration to trigger alarm:	20% lower explosive limit
Prealarm feature:	10% Lower Explosive Limit (LEL)
Autodiagnosics:	✓
Relay contacts rating (resistive load):	5 A / 250 V AC
Power supply:	12 V DC / 100 mA
Operation temp:	-10 °C ... 40 °C
Weight:	0.11 kg
Dimensions:	74 x 101 x 38 mm
Manufacturer / Brand:	JABLOTRON
Guarantee:	2 years


PRESENTATION

Front panel:

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



Internal view:

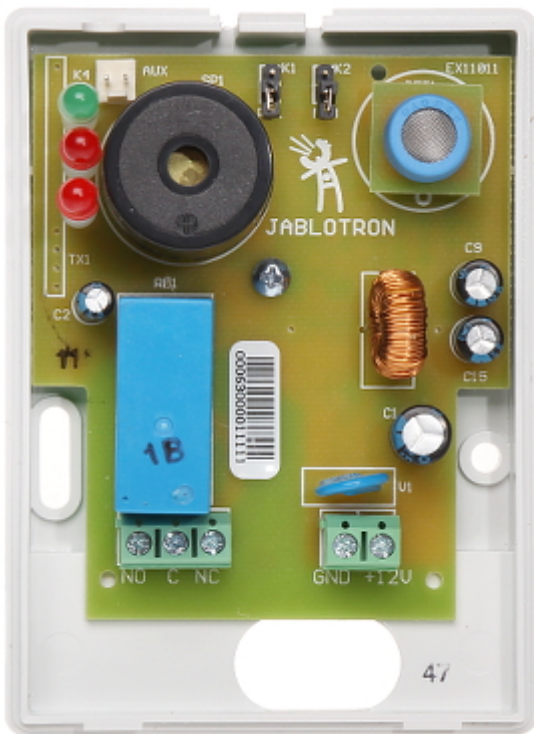

Mounting side view:

