

Code: DS-PWA32-NGT

ALARM KIT **DS-PWA32-NGT** Hikvision

Net: **246.77 EUR** Gross: **246.77 EUR**

The DS-PWA32-NGT alarm set is ideal solution for those looking for a simple and reliable system with enhanced communication functions to protect small objects, such as houses, kiosks, boutiques and service points.

The kit includes: "DS-PWA32-HGR" wireless control panel, "DS-PD2-P10P-W" motion detector, "DS-PD1-MC-WWS" reed contact and "DS-PTS-MF" - keyfobs 5 pcs.



SPECIFICATION

Number of supported wireless devices:	max. 32 pcs
Partitions:	1 pcs
PIR detectors included:	1 pcs, Wireless
Magnetic contact included:	1 pcs, Wireless
The RFID cards/keyfobs support:	max. 12 pcs In the kit : 5 pcs
Enclosure included:	✓
Keyboard included:	—
Timers:	—
Number of supported wireless sirens:	max. 2 pcs (not included)
Number of supported remote control keyfobs:	max. 8 pcs (not included)
Users + admins:	13 (11 + 2)
Expander included :	—
Wireless:	868 MHz
Radio communication range (at open area):	≤ 800 (open area)
Built-in modules:	• Wi-Fi module IEEE 802.11 b/g/n, 2.4 GHz • LAN, 10/100Mb • GPRS module - It supports push messages, SMS text notifications, and audio notifications via the phone
Internal backup battery:	3.8 V / 4520 mAh - Li-Ion battery
Access from PC:	iVMS-4200 application
Mobile phones support:	✓
Power supply:	5 V DC (power adapter included)

Main features:	• Support for bidirectional communication of alarm events and other signals via the LAN, Wi-Fi, GPRS networks using the main and backup channels • Support for video events via a mobile client and email • Configuration via the www client, mobile client or software • Compliance with the SIA-Contact ID protocol
Housing:	Plastic
Operation temp:	-10 °C ... 55 °C
Weight:	0.33 kg
Dimensions:	155 x 155 x 35 mm
Supported languages:	English, Polish

MAGNETIC CONTACT:

Detection:	Opening the door or window
Alarm signaling:	Signal to control panel
Frequency range:	868 MHz
Radio communication range (at open area):	max. 800 m
Alarm inputs:	—
Battery:	1 x 3 V CR123A - included
Backup time:	~ 2 years
Protection class (Grade):	Grade 2
Environment class:	Grade 2
Operation temp:	-10 °C ... 40 °C
Weight:	0.06 kg
Dimensions:	• 105 x 27 x 26 mm - Transmitter • 50 x 15 x 14 mm - magnet

PIR DETECTOR:

Application:	Indoor
Frequency range:	868 MHz Pyronix protocol
Radio communication range (at open area):	max. 800 m (open area)
Pyroelectric sensor:	Double
Sensor type:	Passive Infra Red (PIR)
Detection range / Detection angle:	10 m / 85 °
Sensitivity adjustment:	Automatic
Pet immunity:	≤ 24 kg
Digital temperature compensation:	✓
Alarm output:	Wireless
Power supply:	1 x 3 V CR123A
Battery lifetime:	~ 2 years
Target speed range:	0.3 ... 3 m/s
Protection class (Grade):	Grade 2
Operation temp:	-10 °C ... 40 °C
Weight:	0.13 kg
Dimensions:	68 x 106 x 50 mm

RFID PROXIMITY KEY-FOB:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Standard:	13.56 MHz S50 : 14.1 ... 14.4 MHz
In the kit:	5 pcs
Weight:	0.005 kg
Dimensions:	26 x 50 x 4 mm

General information:

Manufacturer / Brand:	Hikvision
SAP Code:	302401170
Guarantee:	3 years

PRESENTATION

Wireless Control Panel:




Bottom view (after remove the cover):



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



Connectors:

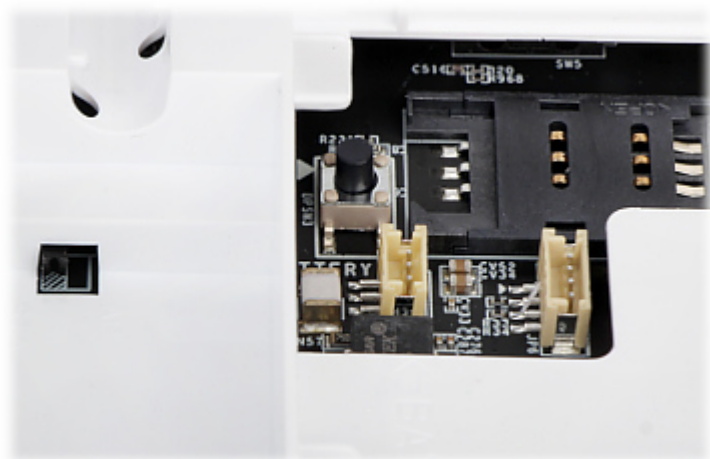

Wireless detector:




Reed switch:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



Schematic diagram:

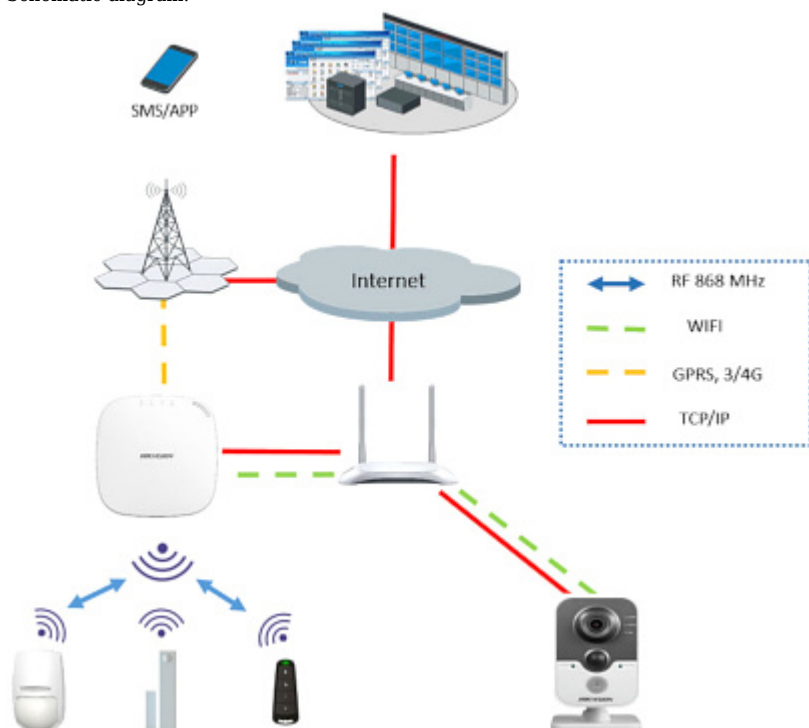



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------