

Code: DS-2CE56D0T-IRM(2.8mm)

## HD-TVI CAMERA **DS-2CE56D0T-IRM(2.8mm)** - 1080p Hikvision

Net: **172.00 PLN** Gross: **211.56 PLN**

Megapixel camera with 1/3" Progressive Scan CMOS sensor and HD-TVI (High Definition Transport Video Interface).

The HD-TVI interface allows to transmission of analog video signal via coaxial cable at resolutions up to 1080p. It enables the transmission of HD resolution images for even 500 m distance with keeping the low costs of the installation. During transmission there are no delays and is maintained the original, high quality image.

Housing construction allows to mount the camera to the ceiling and the wall (image is right oriented in both cases).

Camera is according to IP66 Index of Protection norm.



### SPECIFICATION

Standard:	HD-TVI
Sensor:	Progressive Scan CMOS
Matrix size:	2.1 Mpx
Resolution:	1920 x 1080 - 1080p @ HD-TVI
Range of IR illumination:	20 m
IR illuminator power adjustment:	Automatic
Lens:	2.8 mm
View angle:	<ul style="list-style-type: none"><li>• 103 ° (manufacturer data)</li><li>• 101 ° (our tests result)</li></ul>
S/N ratio:	> 62 dB
Video output:	1 x HD-TVI - BNC socket
Main features:	<ul style="list-style-type: none"><li>• ICR - Movable InfraRed filter</li><li>• DNR - Digital Noise Reduction</li><li>• IR illuminator optimization</li></ul>
OSD menu:	—
Power supply:	12 V DC / 330 mA
Power consumption:	≤ 4 W
Housing:	Dome - Metal
Color:	White
"Index of Protection":	IP66
Operation temp:	-40 °C ... 60 °C

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60


Weight:	0.25 kg
Dimensions:	90 x 83 x 59 mm
Country of origin:	China
Manufacturer / Brand:	Hikvision
SAP Code:	300607121
Guarantee:	<b>3 years</b>

## PRESENTATION

Camera is out from clamping ring:



Mounting side view:

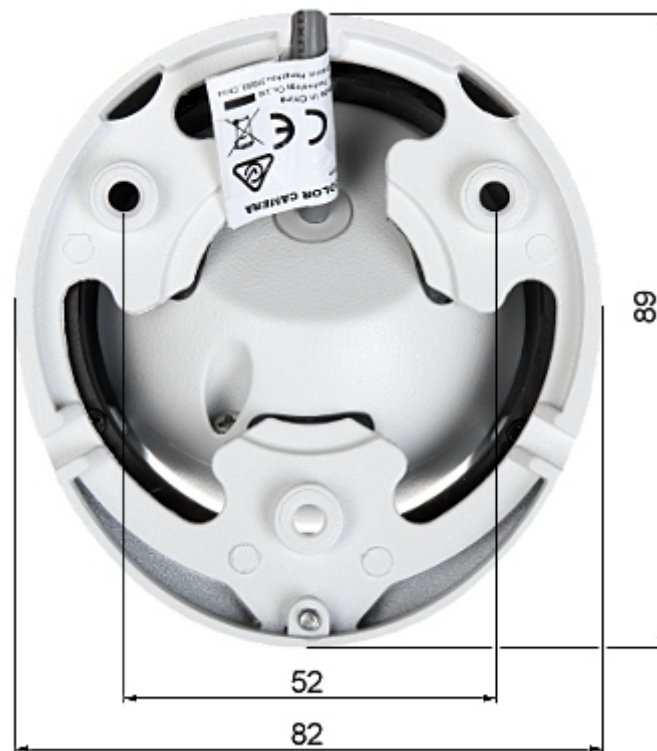

In the kit:



## OUR TESTS


Camera image at artificial illumination (about 30Lux):



Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:

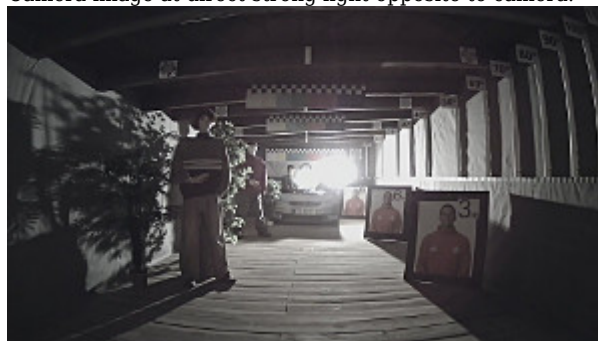

## OUR OPINIONS

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



- Small sizes of the camera allow to use it to discreet monitoring.

