

Code: DS-2CE56D0T-IT3(6mm)

## HD-TVI CAMERA **DS-2CE56D0T-IT3(6mm)** - 1080p HIKVISION

Net: **54.22 USD** Gross: **66.69 USD**

Megapixel camera with Progressive Scan CMOS sensor and HD-TVI (High Definition Transport Video Interface).

The HD-TVI interface allows to transmission of analog video signal via coaxial cable at resolutions up to max. 8.3 Mpx (4K UHD). During transmission there are no delays and is maintained the original, high quality image.

Housing construction allows to mount the camera to the ceiling and the wall (image is right oriented in both cases).



### SPECIFICATION

Standard:	HD-TVI
Sensor:	Progressive Scan CMOS
Matrix size:	2.1 Mpx
Resolution:	1920 x 1080 - 1080p
Range of IR illumination:	40 m
IR illuminator power adjustment:	Automatic
Lens:	6 mm
View angle:	<ul style="list-style-type: none"><li>• 54 ° (manufacturer data)</li><li>• 47 ° (our tests result)</li></ul>
Video output:	1 Vpp / 75 Ω - HD-TVI, BNC socket
Main features:	<ul style="list-style-type: none"><li>• 2D-DNR - Digital Noise Reduction</li><li>• BLC - Back Light Compensation</li><li>• AGC - Automatic Gain Control</li><li>• ICR - Movable InfraRed filter</li><li>• EXIR - high-efficiency infrared LEDs technology, which evenly covers the whole plan of both central vantage points of the scene as well as the corners</li><li>• Auto White Balance</li></ul>
OSD menu:	—
Power supply:	12 V DC / 330 mA
Power consumption:	≤ 4 W
Housing:	Dome - Plastic
Color:	White

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60

"Index of Protection":	IP66
Operation temp:	-20 °C ... 45 °C
Weight:	0.22 kg
Dimensions:	Ø 110 x 93 mm
Supported languages:	—
Manufacturer / Brand:	HIKVISION
SAP Code:	300606886
Guarantee:	<b>3 years</b>

## PRESENTATION


Camera is out from clamping ring:




Mounting side view:



Mounting dimensions:

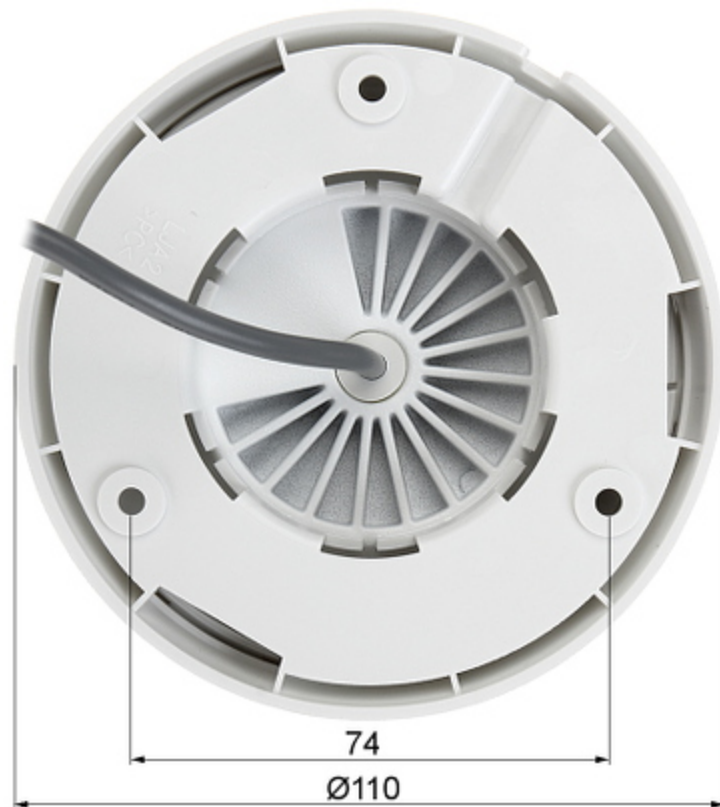

Camera dimensions:

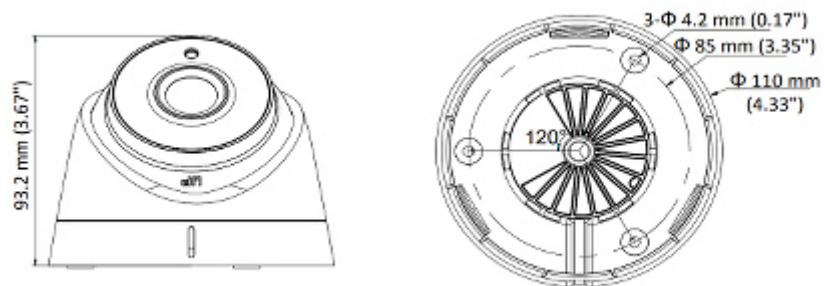


In the kit:



## OUR TESTS

Camera image at artificial illumination (about 30Lux):

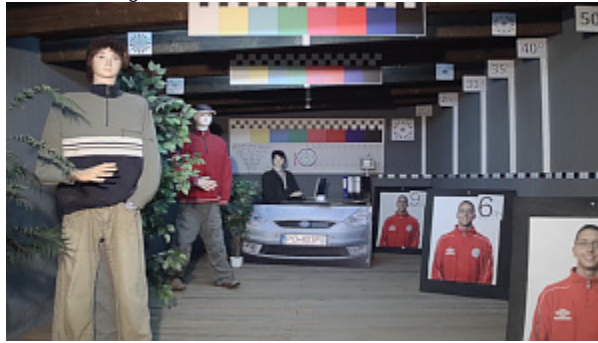

Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:

