

Code: DS-2CC52D9T-AITZE(2.8-12MM)

HD-TVI, PAL CAMERA **DS-2CC52D9T-AITZE(2.8-12MM)** - 1080p PoC.at Hikvision

Net: **250.27 EUR** Gross: **250.27 EUR**

Megapixel camera with Progressive Scan CMOS sensor and HD-TVI (High Definition Transport Video Interface).

The HD-TVI interface allows to transmission of analog video signal via coaxial cable at resolutions up to 1080p. During transmission there are no delays and is maintained the original, high quality image.

The used motozoom lens with 2.8 ... 12 mm focal length allows to remote view angle adjustment.

The ability to power the camera via a coaxial cable according to the innovative PoC (Power over Coaxial) standard allows to eliminate the need for additional wiring to the unit. Camera is according to IP67 Index of Protection norm.



SPECIFICATION

Standard:	HD-TVI, PAL
Sensor:	Progressive Scan CMOS
Matrix size:	2.1 Mpx
Resolution:	1920 x 1080 - 1080p @ HD-TVI
Lens:	2.8 ... 12 mm - Motozoom
View angle:	98 ° ... 32 °
Range of IR illumination:	40 m
IR illuminator power adjustment:	Automatic
S/N ratio:	> 52 dB
Video output:	1 x HD-TVI - BNC socket 1 x CVBS - BNC socket
Main features:	• Motozoom lens • WDR - 120 dB - Wide Dynamic Range • 2D-DNR, 3D-DNR - Digital Noise Reduction • Sense-UP - (Slow Shutter) - Increase the sensor sensitivity • EXIR - high-efficiency infrared LEDs technology, which evenly covers the whole plan of both central vantage points of the scene as well as the corners • The ability to power the camera via a coaxial cable according to the innovative PoC (Power over Coaxial) standard allows to eliminate the need for additional wiring to the unit • F-DNR (Defog) - Reduction of image noise caused by precipitation • ICR - Movable InfraRed filter • Privacy zones - max. 8 • Motion Detection - max. 4 zones • BLC/HLC - Back Light / High Light Compensation • Mirror - Mirror image • Alarm inputs / outputs : 1 / 1

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

OSD menu:	✓
Power supply:	PoC.at , 24 V AC / 240 mA , 12 V DC / 500 mA
Power consumption:	≤ 6 W
Housing:	Dome, Plastic
"Index of Protection":	IP67
Color:	White
Operation temp:	-40 °C ... 60 °C
Weight:	0.45 kg
Dimensions:	Ø 136 x 102 mm
Supported languages:	English
Country of origin:	China
Manufacturer / Brand:	Hikvision
SAP Code:	300608573
Guarantee:	3 years

PRESENTATION

Camera view after remove the Dome cover:




Internal view of the housing:



Mounting side view:



Camera dimensions:

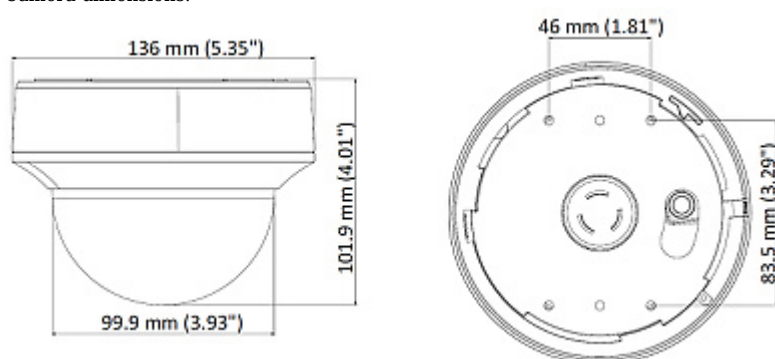


In the kit:



OUR TESTS


Camera image at artificial illumination (about 30Lux):

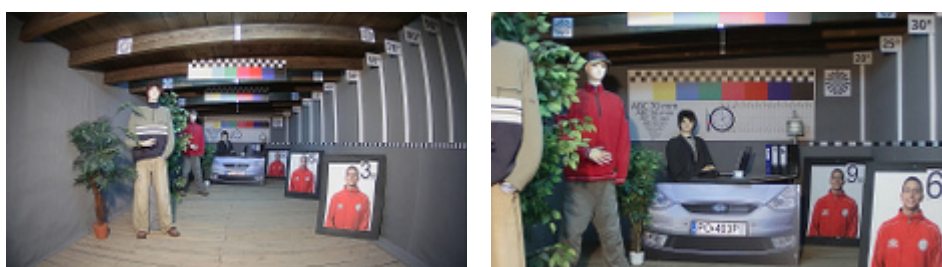

Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:

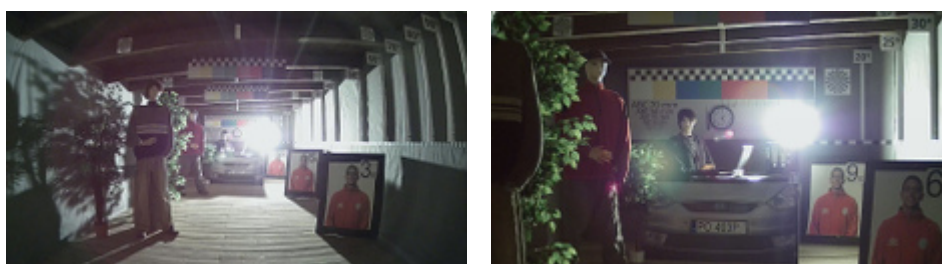

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------