

Code: DS-K1102MK

PROXIMITY READER **DS-K1102MK** Hikvision

Net: **66.32 EUR** Gross: **81.57 EUR**

Outdoor proximity cards and key-fobs reader.



SPECIFICATION

| | |
|--------------------------------|--|
| Cards support: | MIFARE 13.56 MHz |
| Reading distance of prox-keys: | max. 5 cm |
| Autonomous operation: | — |
| Keyboard built-in: | ✓ |
| Doorbell button: | — |
| Communication: | RS-485, Wiegand 34/26 |
| Tamper output: | ✓ |
| Power supply: | 12 V DC |
| Maximal current consumption: | 500 mA |
| Main features: | <ul style="list-style-type: none">• Blue backlight of the keys• Watchdog built-in• LED indication• Buzzer• Device address switch• Installation in dedicated flush-mounted boxes DS-KAB86, DS-KAB118 |
| Operation temp: | -20 °C ... 65 °C |
| Permissible relative humidity: | 10 ... 90 % (non-condensing) |
| "Index of Protection": | IP64 |
| Housing: | Plastic, Waterproof |
| Color: | Black |

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

| | |
|-----------------------|------------------|
| Weight: | 0.24 kg |
| Dimensions: | 121 x 87 x 14 mm |
| Manufacturer / Brand: | Hikvision |
| SAP Code: | 302900510 |
| Guarantee: | 3 years |


PRESENTATION

Front panel view:




Mounting side view:




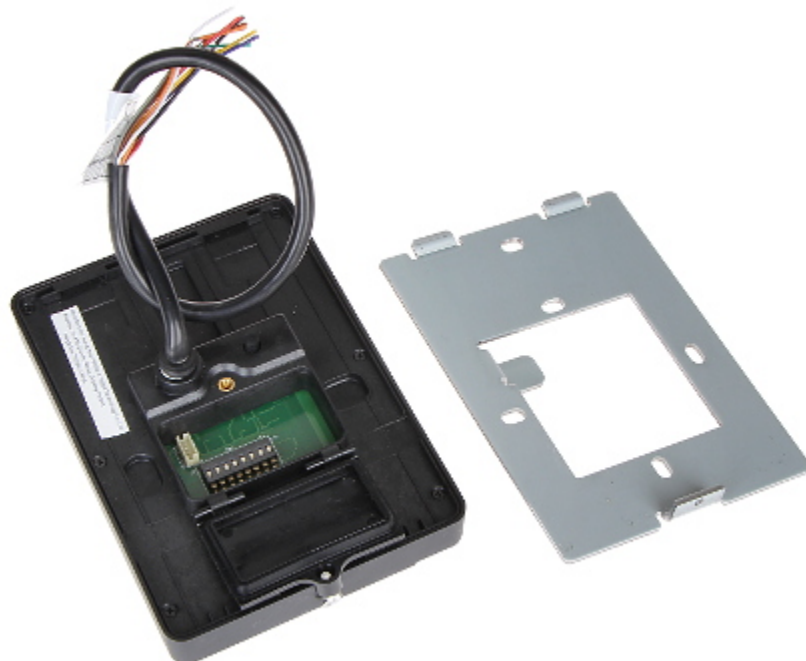

On the body, under the cover there are placed configuration switches:

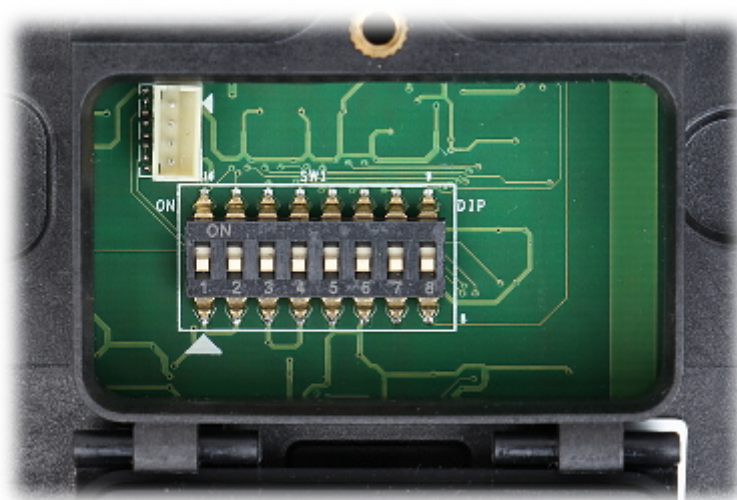

Connectors:

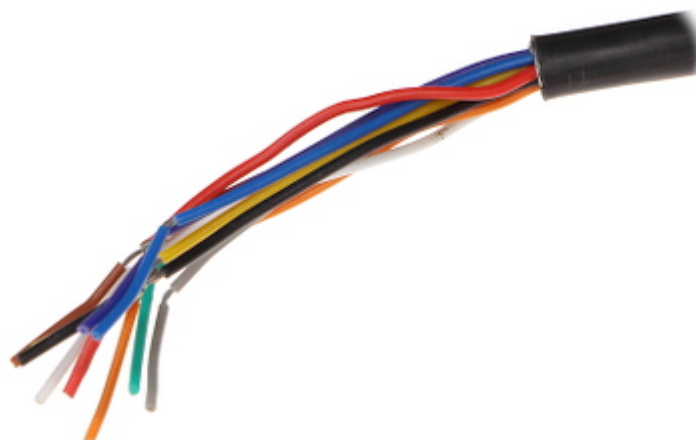

Connectors description:

| WIRE COLOR | SIGNAL |
|------------|--------|
| ORANGE | ERR |
| WHITE | W1 |
| GREEN | W0 |
| BLUE | 485B |
| YELLOW | 485A |
| RED | 12V |
| BLACK | GND |
| GREY | TAMPER |
| PURPLE | BEEP |
| BROWN | OK |

In the kit:

