

Code: MCT12E-IO

PROXIMITY READER **MCT12E-IO** ROGER

Net: **85.71 EUR** Gross: **85.71 EUR**



Outdoor reader of proximity cards and key-fobs designed to work in the RACS 5 access control and building automation system. Unique 125 kHz standard.

SPECIFICATION

Support:	RACS 5 (Roger)
Cards support:	Unique EM 125kHz
Reading distance of prox-keys:	max. 7 cm
Keyboard built-in:	✓
Autonomous operation:	—
Doorbell button:	✓
Tamper output:	✓
Communication:	<ul style="list-style-type: none">• RS-485,• RACS 5 (Roger)
Main features:	<ul style="list-style-type: none">• Tamper protection (detection of removing from mounting surface and enclosure opening)• LED indication• Beep signal• Built-in in/out lines• 3 inputs• 1 Relay output : REL1 - NO/NC, 30 V AC/DC / 1.5 A• Two transistor outputs : IO1, IO2 - "Open Collector" (OC) type, max. 15 V DC / 1 A
Power supply:	10 ... 15 V DC
Average current consumption:	~ 50 mA
Operation temp:	-25 °C ... 60 °C
Permissible relative humidity:	10 ... 95 % (non-condensing)
"Index of Protection":	IP65

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Weight:	0.17 kg
Dimensions:	152 x 46 x 23 mm
Manufacturer / Brand:	ROGER
Guarantee:	3 years

PRESENTATION

Front panel:



Rear view:




Internal view, after remove the cover:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



Dimensions:

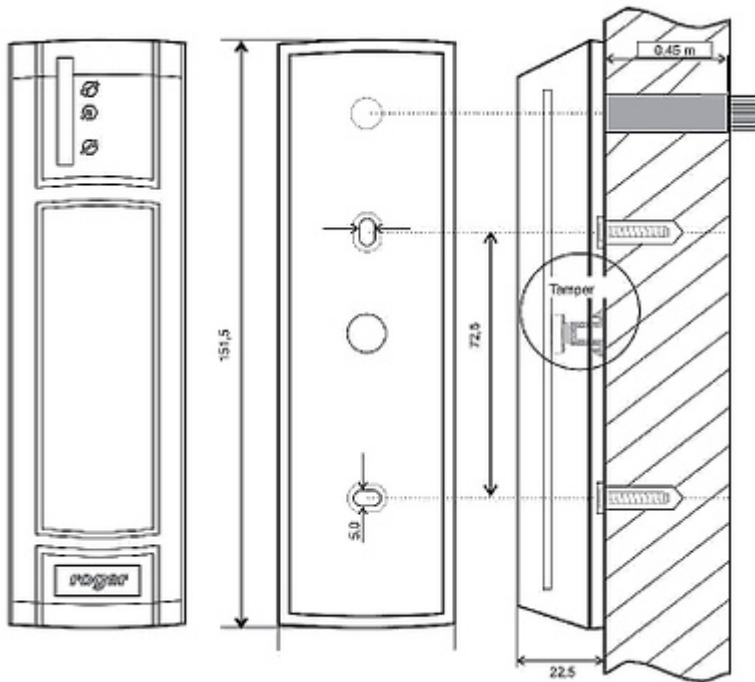

In the kit:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

