

Code: MCT82M-IO

PROXIMITY READER WITH KEYPAD **MCT82M-IO** ROGER

Net: **102.42 EUR** Gross: **125.98 EUR**

Indoor proximity cards and key-fobs reader. MIFARE 13.56 MHz standard.

The readers with IO option offer the set of inputs and outputs which, in most cases, should be capable to operate single door passage without necessity to use inputs or outputs located on access controller or expansion unit.



SPECIFICATION

Support:	RACS 5 (Roger)
Cards support:	MIFARE 13.56 MHz
Reading distance of prox-keys:	max. 7 cm
Keyboard built-in:	✓
Autonomous operation:	✓
Doorbell button:	—
Tamper output:	✓
Communication:	RS-485
Main features:	<ul style="list-style-type: none">• Tamper protection (detection of removing from mounting surface and enclosure opening)• LED indication• Beep signal• Touch and backlit keyboard buttons• 3 Inputs,• Multifunctional parametric inputs including Double Wiring• 2 Transistor outputs,• 1 Relay output
Power supply:	10 ... 15 V DC
Average current consumption:	60 mA
Operation temp:	-10 °C ... 50 °C
Permissible relative humidity:	10 ... 95 % (non-condensing)
"Index of Protection":	IP41

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Weight:	0.12 kg
Dimensions:	85 x 85 x 22 mm
Manufacturer / Brand:	ROGER
Guarantee:	3 years

PRESENTATION

Front panel:





Rear view:





Internal view of the housing:

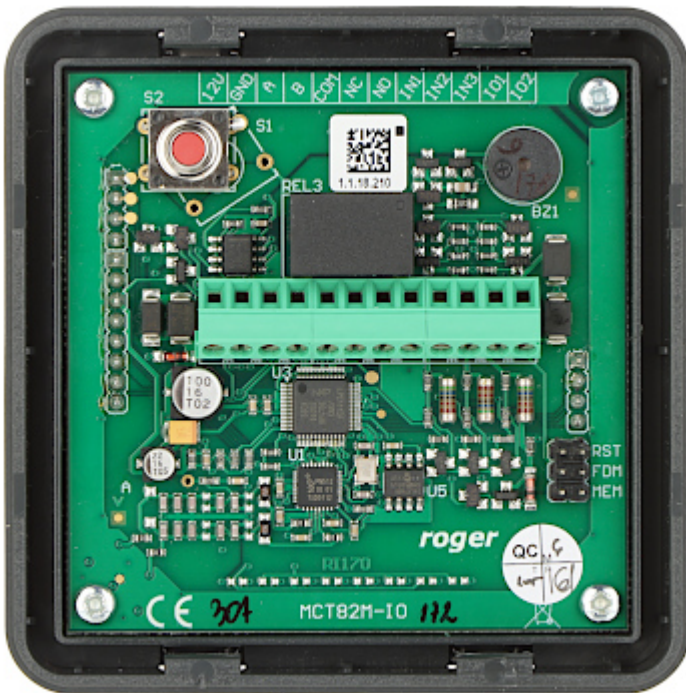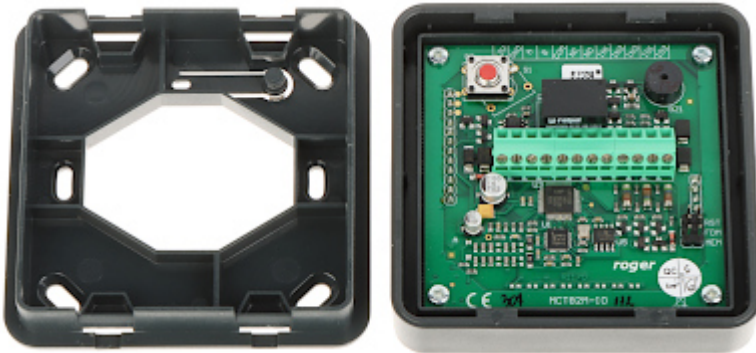

In the kit:

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

