

Code: MC340

CYLINDRICAL MAGNETIC CONTACT **MC340** ALARMTECH

Net: **6.81 EUR** Gross: **8.38 EUR**

The magnetic contacts can be used wherever required for controlling the status of doors, windows and/or other movable elements, e.g. for protection or monitoring of access to particular sites, spaces, facilities, in automatic control systems, etc.

The magnetic contact element containing the magnet should be mounted on the movable part, while the reed switch - on the stationary part of protected doors, windows, etc. The sunk magnetic contact is designed for face mounting in such materials as wood or plastic.

The contact is to be pressed in.




SPECIFICATION

Detection:	Opening the door or window
Maximum reed switched voltage:	48 V DC
Maximum switched current:	500 mA
Make distance:	21 mm
Break distance:	25 mm
Main features:	<ul style="list-style-type: none">• Length of the cable : 2 m• Mounting hole diameter for the sensor : 8 mm• NC output - a magnet close to a reed switch - does not trigger an alarm, the contacts are closed• Tamper signaling• Plastic (ABS)• "Index of Protection" : IP67
Environmental class EN 50130-5:	Class IIIA
Protection class (Grade):	EN 50131-2-6 Grade 2
Color:	White
Operation temp:	-40 °C ... 70 °C
Dimensions:	Ø 26 x 9 mm (with flange)
Weight:	0.04 kg
Manufacturer / Brand:	ALARMTECH
Guarantee:	2 years

PRESENTATION

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

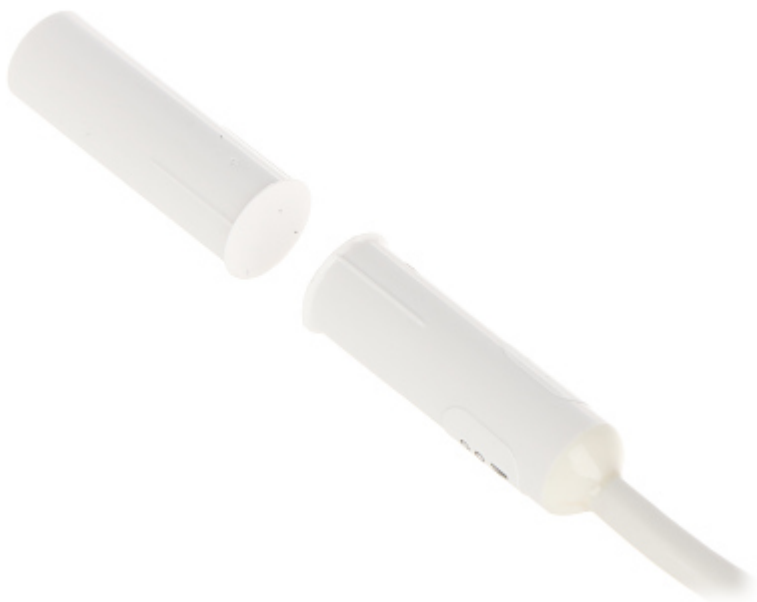

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

