


Code: LE-403430

## CIRCUIT BREAKER **LE-403430** ONE-PHASE 6 A C TYPE LEGRAND

Thermal-magnetic circuit breaker with C-type curve and 6A rated current. The LE-403430 circuit breaker is compatible to DIN TS-35 rail mounting system.

Circuit breakers with C-type breaking curve are designed to protection against short-circuits and overloads of the installation, where are used the devices with high inrush currents (motors, transformers).

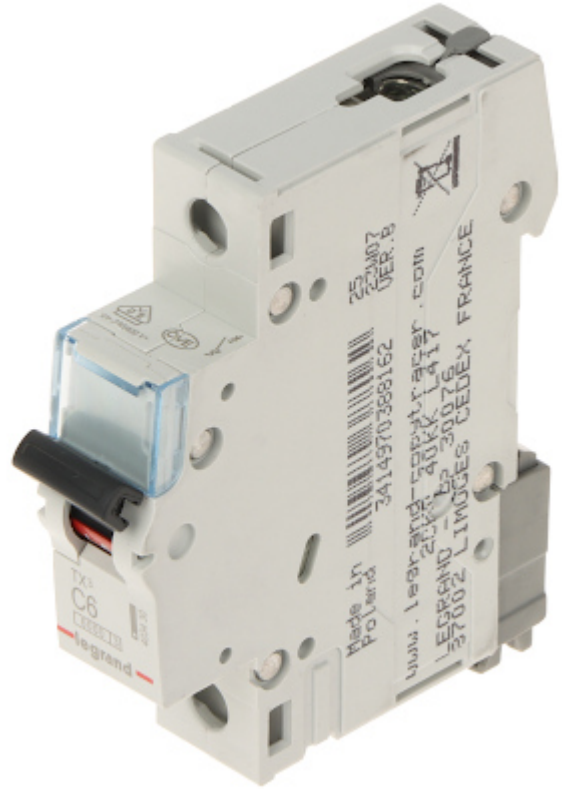

Device type:	Circuit Breaker, One-phase
Rated current:	6 A
Number of poles:	1
Tripping curves:	C type
Breaking capacity:	6000 A
Rated voltage:	<ul style="list-style-type: none"> <li>• 230 V AC / 50 Hz</li> <li>• 400 V AC / 50 Hz</li> </ul>
Connectors type:	screw terminals
Main features:	<ul style="list-style-type: none"> <li>• Can be equipped with DX3 series signalling and remote tripping auxiliaries and motorised controls</li> <li>• No possibility of connecting the residual-current blocks</li> <li>• Can be connected with using the supply busbars fork-type or prong-type</li> <li>• Provided space for a label with description</li> </ul>
Housing:	Plastic, DIN, TS-35 rail mounting
Width in 17.5 mm modules:	1
Weight:	0.104 kg



# DATA SHEET

---

Dimensions:	17.5 x 88 x 74 mm
Manufacturer / Brand:	LEGRAND
Guarantee:	2 years

