


Code: SF-1

SOFT START MODULE **SF-1**

"Soft Start" module limits temporarily high inrush current of the inductive receivers at power up. The module is used as delayed current protection of the toroidal transformers, auto-transformers and halogen lamps.
DANGER! Lethal voltage on board. Use extreme caution! Module should be mounted in enclosures with electrically insulating material with keeping the proper insulating distances.

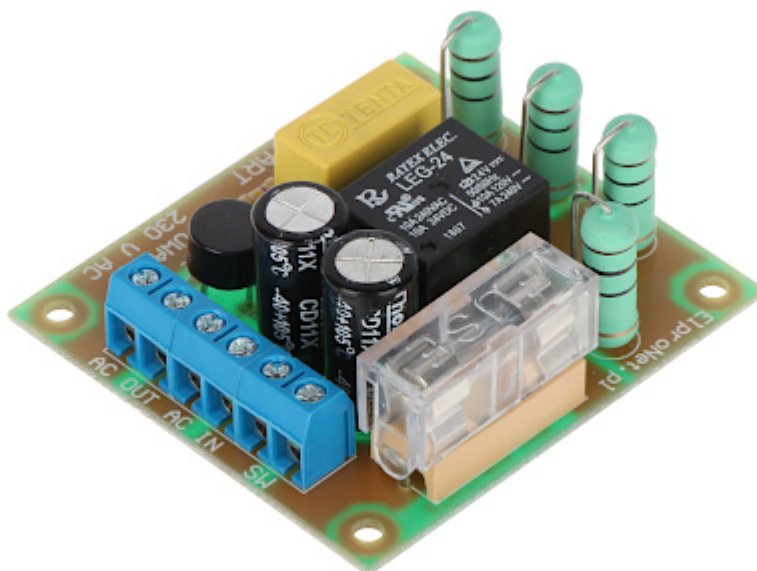

Number of control inputs:	1
Number of power inputs:	1
Number of power outputs:	1
Voltage:	230 V AC
Maximal output power:	1150 W
Protection type:	5 A 5/20mm delayed fuse
Connectors type:	3 x screw terminals max. 1.5 mm ²
Montage hole diameter:	3 mm
Mounting holes distance:	52 x 47 mm
Dimensions:	60 x 55 x 28 mm
Weight:	0.04 kg
Guarantee:	2 years