


Code: PK2-12-ZWT

CONFIGURABLE NORMALLY OPEN RELAYS MODULE **PK2-12-ZWT**

The PK2-12-ZWT module consists of 2 Normally Open relays, controlled independently and the configuration systems setting out control of the relays with high or low state. It can be used to increase maximal load of controller transistor output line and for galvanic isolation between output line and load point.

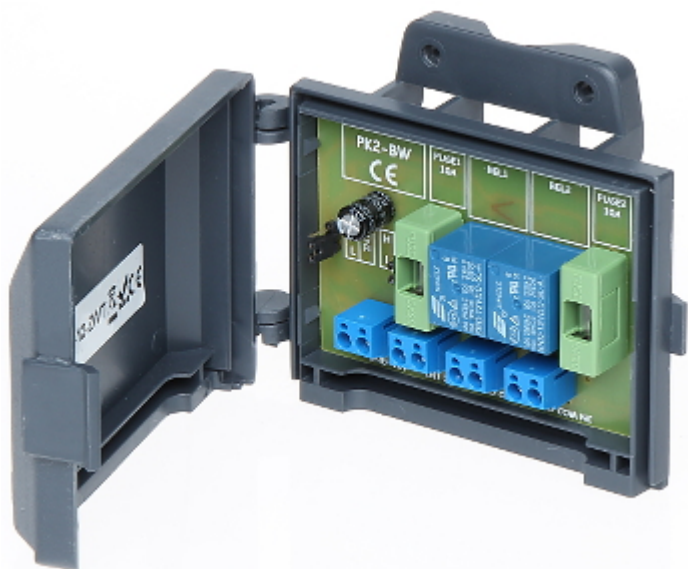

Number of relay outputs:	2
Power supply:	10 ... 16 V DC
Current consumption:	max. 2 x 35 mA / 12 V DC
Relay maximal load:	max. 2 x 10 A, 30 V DC / 50 V AC
Relay switching voltage H:	> 4 V
Relay switching voltage L:	< 2.7 V
Output:	2 x NO
Main features:	• LED indication, • Protections : Overvoltage, Reverse polarity connection, 2 x 5/20mm delayed fuse 10 A, • Splash-proof casing
Operation temp:	-10 °C ... 40 °C
Weight:	0.11 kg
Dimensions:	120 x 90 x 36 mm
Guarantee:	2 years