


Code: ZBF-12V/4A

## BUFFERED SWITCHING POWER SUPPLY ADAPTER **ZBF-12V/4A**

The buffered power supply adapter is designed to powering control panels, sensors, code locks, cameras, consoles, intercoms and other alarm system equipment.

Attention! If the power adaptor is using for continuous work (24H) the rated current of the adaptor should be less than 80% of the maximal current.

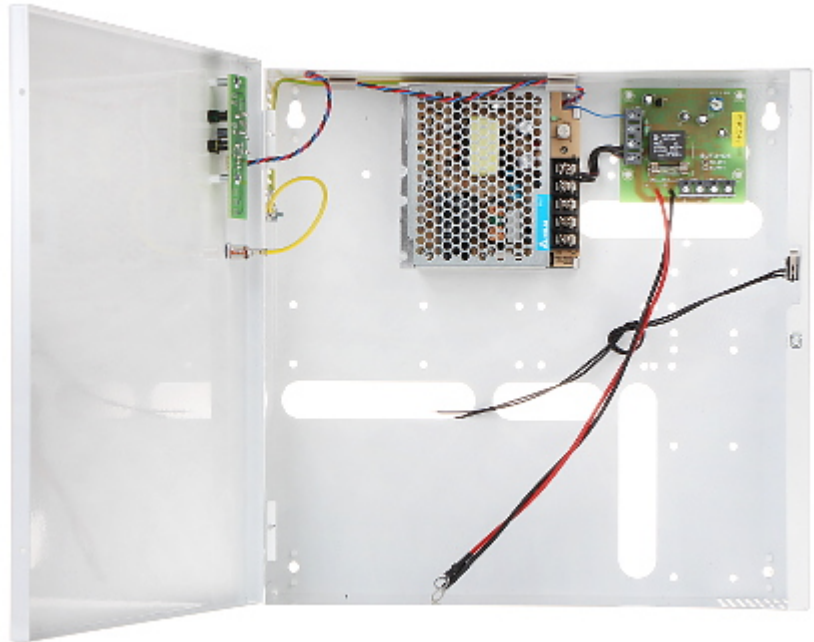

Adapter type:	Switching
Input voltage:	85 ... 264 V AC
Output voltage:	<ul style="list-style-type: none"> <li>• 13.8 V DC (mains mode)</li> <li>• 10.5 V ... 13.8 V DC (battery mode)</li> </ul>
Max. output current (total):	5 A
Battery charging current:	1 A
Power:	74.5 W
Number of outputs:	1
Protections:	<ul style="list-style-type: none"> <li>• Short-circuit</li> <li>• Overload</li> <li>• Overvoltage</li> <li>• Discharge</li> </ul>
Adapter operation control:	<ul style="list-style-type: none"> <li>• AC input voltage presence indication</li> <li>• DC output voltage presence indication</li> </ul>
Place for battery:	12V/18Ah
Max. battery dimensions:	260 x 170 x 75 mm
Weight:	1.84 kg
Dimensions:	288 x 286 x 90 mm
Guarantee:	2 years