



User Manual

Code: DS-2DE7A220MCG-EB

IP SPEED DOME CAMERA OUTDOOR **DS-2DE7A220MCG-EB** 6.7 ... 134 mm Hikvision

Warning!

Please read the user manual included in this work as it contains important information related with safety of installation and use of the device.

Only persons who read the user manual may use the device.

The user manual must be kept because it may be required in the future. The device is to be used exclusively for purposes specified in this user manual.

The device must be unpacked prior to starting-up. After removing the packaging make sure the device is in working order. If the product has defects, it should not be used until it is repaired.

The product is intended for use at home and commercial use and may not be used for other than intended use.

The manufacturer is not liable for damages resulting from not adhering to the rules contained in the user manual, therefore, we recommend to follow the aforementioned safety rules for operation and maintenance of the device. In this way you will ensure yourself safety and avoid causing damage to the device.

The manufacturer and the supplier are not liable for losses or damages arising out of the product, including financial or intangible losses, loss of profits, income, data, pleasure from use of the product or other products related with it - indirect, incidental or consequential loss or damage. The above provisions apply whether the loss or damage concerns:

1. Deterioration of quality or the lack of operation of the products or products related with it due to damage as well as the lack of access to the product when it is undergoing repair, which results in stoppage the loss of user's time or a break in business activity;
2. Improper results of operation of the product or products related with it;
3. It applies to losses and damages according to any legal category, including negligence and other losses, termination of a contract, expressed or implied guarantee and strict liability (even if the manufacturer or the supplier was notified about the possibility of occurrence of such damages).

Safety measures:

Particular attention at designing was directed to quality standards of the device where ensuring safety of operation is the most important factor.

The device must be secured against contact with caustic, staining and viscous fluids.

The device was designed in such a way that it restarts operation when power supply is restored after a break.

Attention! We recommend using protections to further protect the device from possible overvoltages in installations. Surge protectors are effective protection against accidental pass to the device voltages higher than the rated. Damages caused by pass the voltages higher than specified in manual, are not under warranty.

Turn off the device before transporting it.

Prior to connecting the device to a power source check whether the supplied voltage is consistent with rated voltage specified in the user manual.

Proper product disposal:

A marking of a crossed out waste bin indicates that the product may not be disposed together with other household waste in the entire EU. To avoid possible damage to the natural environment of health due to uncontrolled waste disposal, therefore, it should be handed over for recycling, propagating in this way sustainable use of natural resources.

To return a worn-out product, use a collection and disposal system of this type of equipment or contact a seller from whom it was purchased. He will then be recycled in an environmentally-friendly way.

IP camera equipped with very good high resolution sensor. Due to above it is perfect solution for surveillance systems requiring persons or vehicles recognition. In addition, the camera has the function of active deterrence of intruders using a motion-activated white light LED spotlight and siren sound.

Built-in IR illuminator allows to operate at night conditions, and vari-focal lens with wide range of view angle adjustment enables optimal set the view field of camera to all conditions. The range of IR illumination according to the manufacturer data, depends on outer conditions (visibility - air transparency, environment, wall colors ie. scene reflectance).

PoE powering possibility, compatible with the Hi-PoE standard makes the device more universal and easier to install.

For a few models of IP cameras working at $\geq 1920 \times 1080$ resolution we recommend to use of network with 1Gb/s bandwidth.



Standard:	IP
Resolution:	1920 x 1080 - 1080p 1280 x 960 - 1.3 Mpx 1280 x 720 - 720p
Sensor:	1/1.8 " Progressive Scan CMOS
Lens:	6.7 ... 134 mm
View angle:	53 ° ... 4.9 °
Optical zoom:	x 20
Digital zoom:	x 16
Range of IR illumination:	150 m
White light LED illuminator range:	100 m
Video output:	—
Preset rotation speed:	<ul style="list-style-type: none"> • 240 °/s (horizontal) • 200 °/s (vertical)
Rotation speed (manual control):	<ul style="list-style-type: none"> • 0.1 °/s ... 160 °/s (horizontal) • 0.1 °/s ... 120 °/s (vertical)
Horizontal rotation range:	360 ° - continuous
Vertical rotation range:	-15 ° ... 90 °



User Manual

Code: DS-2DE7A220MCG-EB

IP SPEED DOME CAMERA OUTDOOR **DS-2DE7A220MCG-EB** 6.7 ... 134 mm Hikvision

RS-485 interface:	—
Number of presets:	300
Horizontal scan:	✓
Route settings:	8
Image compression method:	H.265+ / H.265 / H.264+ / H.264 / MJPEG
Alarm inputs / outputs:	2 / 1
Audio:	<ul style="list-style-type: none">• Audio input• Audio output• Bi-directional audio streaming support• Digital Noise Reduction,• Audio detection,• Speaker built-in - Alarm siren• Compliance with the AAC standard
Main stream frame rate:	25 fps @ 1080p
Interface:	10/100 Base-T (RJ-45)
WEB Server:	Built-in
Max. number of on-line users:	32
ONVIF:	19.12
Memory card slot:	Micro SD memory cards up to 256GB support (possible local recording)
Mobile phones support:	Port no.: 8000 or access by a cloud (P2P) <ul style="list-style-type: none">• Android: Free application Hik-Connect• iOS: Free application Hik-Connect
Access from PC:	Port no.: 8000 or access by a cloud (P2P) - PC : iVMS-4200 application
Default IP address:	192.168.1.64
Default admin user / password:	admin / - The administrator password should be set at the first start
Web browser access ports:	80
Mobile client access ports:	8000
PC client access ports:	8000
Port ONVIF:	80
RTSP URL:	<ul style="list-style-type: none">• Main stream : rtsp://user:password@192.168.1.64:554/Streaming/Channels/101/• Sub stream : rtsp://user:password@192.168.1.64:554/Streaming/Channels/102/
Intelligent image analysis:	<ul style="list-style-type: none">• crossing the line (tripwire) - classification of people and vehicles• intrusion - classification of people and vehicles• detection of entry into the area / exit from the area - classification of people and vehicles• abandoned/missing object• face detection - detection of up to 5 faces simultaneously• advanced face capture features



User Manual

Code: DS-2DE7A220MCG-EB

IP SPEED DOME CAMERA OUTDOOR **DS-2DE7A220MCG-EB** 6.7 ... 134 mm Hikvision

Main features:	<ul style="list-style-type: none">• WDR - 120 dB - Wide Dynamic Range• EIS - Electronic Image Stabilization• 3D-DNR - Digital Noise Reduction• ROI - improve the quality of selected parts of image• F-DNR (Defog) - Reduction of image noise caused by precipitation• BLC/HLC - Back Light / High Light Compensation• Motion Detection• Configurable Privacy Zones - 24• Sharpness - sharper image outlines• Configurable: brightness, contrast, saturation• AGC - Automatic Gain Control• ICR - Movable InfraRed filter• Day/Night mode (color/b&w/auto)• Auto White Balance• Intelligent 3D Positioning System• Intelligent Object Tracking• Active deterrence function - Light and sound alarm• Parking action - this function enables to locate the camera to specific position automatically if operator doesn't operate the controller for some time• ANR - Automatic Network Replenishment allows to save image to the card when the network connection with DVR is break (network failure) and next synchronize its• NAS - Network Attached Storage support
Protections:	<ul style="list-style-type: none">• Protection against lightning discharges : 6 kV• Overvoltage limiter, Overvoltage protection
Power supply:	<ul style="list-style-type: none">• Hi-PoE,• 24 V AC (power adapter included)
Power consumption:	≤ 42 W
Housing:	Speed Dome, Metal
Color:	White
Operation temp:	-30 °C ... 65 °C
"Index of Protection":	IP66
Mechanical protection class:	IK10
Weight:	5.5 kg
Dimensions:	<ul style="list-style-type: none">• Ø 220 x 357 mm (without bracket)• Ø 220 x 387 x 453 mm (with bracket)
Supported languages:	Polish, English, Bulgarian, Croatian, Czech, Danish, Estonian, Finnish, French, Greek, Spanish, Dutch, German, Norwegian, Portuguese, Russian, Romanian, Serbian, Slovak, Slovenian, Swedish, Turkish, Hungarian, Vietnamese, Italian
Manufacturer / Brand:	Hikvision
SAP Code:	327000846
Guarantee:	3 years


Bottom view:




Camera connectors:



Connectors description:

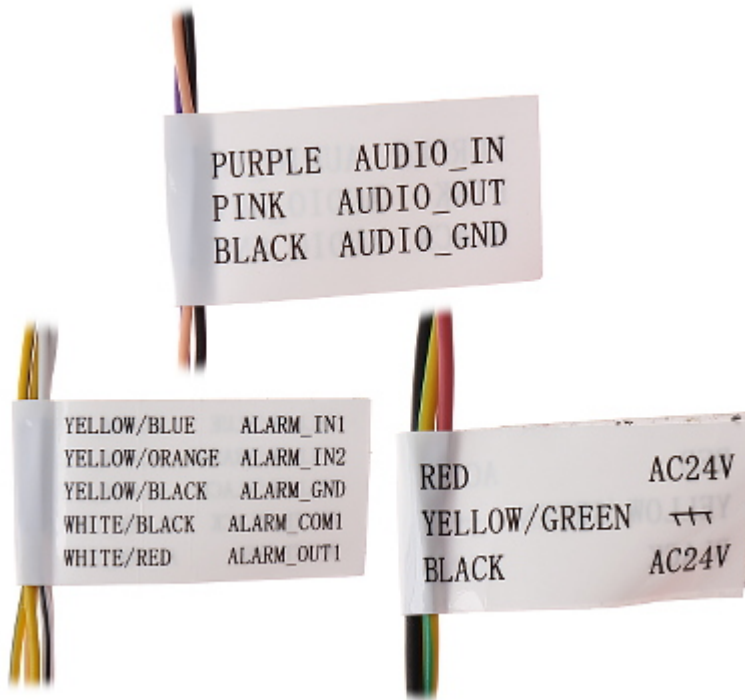

Camera dimensions:

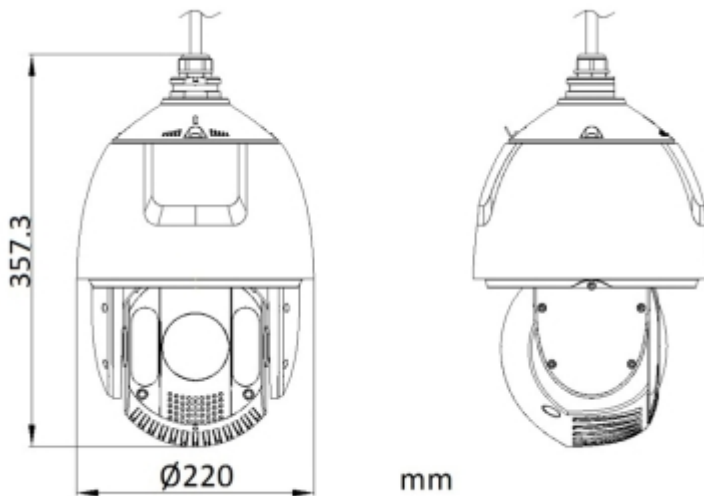

Bracket dimensions:



In the kit:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------