


Code: LE-403403

## CIRCUIT BREAKER **LE-403403** THREE-PHASE 20 A B TYPE LEGRAND

Thermal-magnetic circuit breaker with B-type curve and 20A rated current. The LE-403403 circuit breaker is compatible to DIN TS-35 rail mounting system.

Circuit breakers with B-type breaking curve are designed to protection against short-circuits and overloads of the lighting, control circuits and outlets.

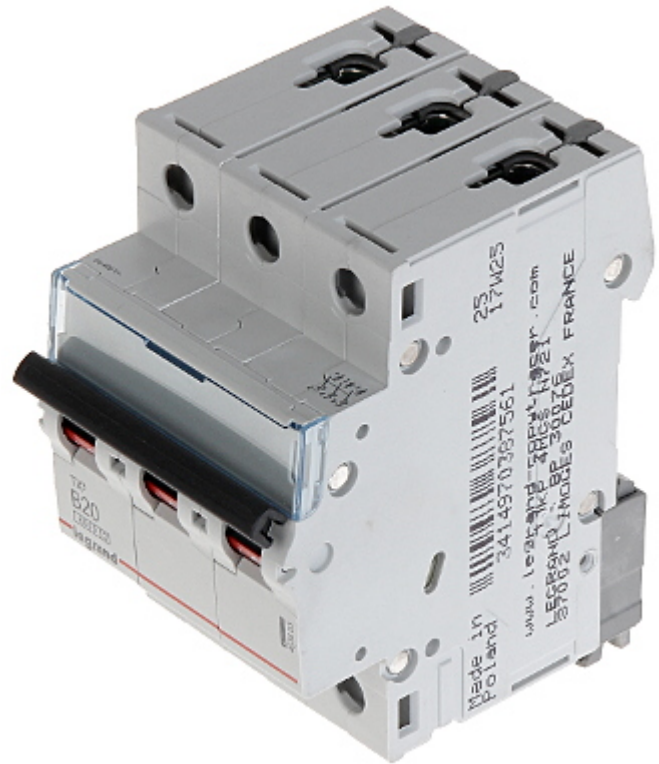

Device type:	Circuit Breaker, Three-phase
Rated current:	20 A
Number of poles:	3
Tripping curves:	B type
Breaking capacity:	6000 A
Rated voltage:	400 V AC / 50 Hz
Connectors type:	screw terminals
Main features:	<ul style="list-style-type: none"> <li>• Can be equipped with DX3 series signalling and remote tripping auxiliaries and motorised controls</li> <li>• No possibility of connecting the residual-current blocks</li> <li>• Can be connected with using the supply busbars fork-type or prong-type</li> <li>• Provided space for a label with description</li> </ul>
Housing:	Plastic, DIN, TS-35 rail mounting
Width in 17.5 mm modules:	3
Weight:	0.33 kg
Dimensions:	53 x 83 x 75 mm



# DATA SHEET

---

Manufacturer / Brand:	LEGRAND
Guarantee:	2 years

