


Code: DRS-24V30W-1NZ

## SWITCHING ADAPTER **DRS-24V30W-1NZ** Delta Electronics

Switching adapter installed on the TS35/7.5 or 15 DIN rail, resistant to high operation temperatures (up to 70°C).

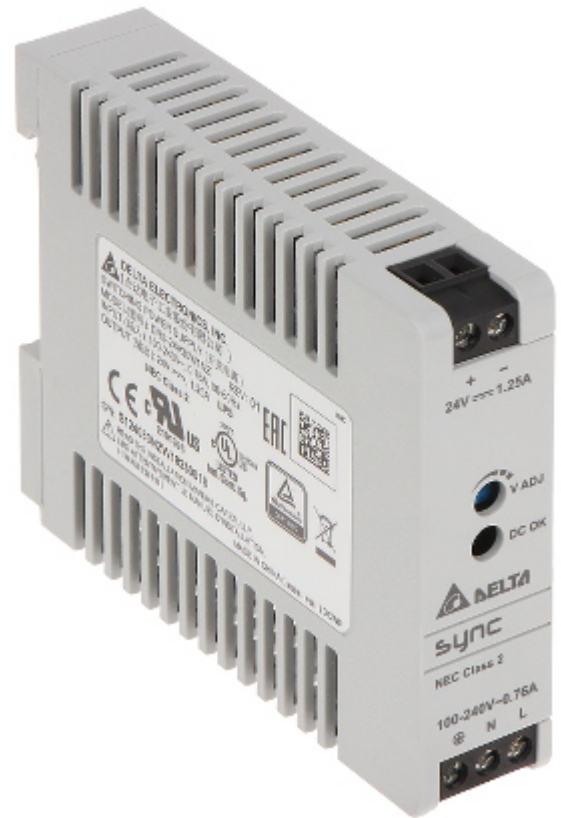

Adapter type:	Switching
Power voltage:	85 ... 264 V AC
Output voltage:	24 V DC
Output voltage adjustment:	24 ... 28 V
Voltage tolerance:	< 2 %
Maximal load:	1.25 A
Output power:	30 W
Number of outputs:	1 pcs
Efficiency:	88 %
Housing type:	DIN
MTBF (Mean Time Between Faults):	700000 hours Telcordia SR-332
Vibration resistance:	IEC60068-2-6, 10 ... 500 Hz max. 2 G for 60 minutes



# DATA SHEET

Protections:	<ul style="list-style-type: none"><li>• Short-circuit</li><li>• Overvoltage</li><li>• Overload protection</li><li>• Temperature</li></ul>
Operation temp. / Relative humidity:	-20 °C ... 70 °C / 5 % ... 95 %
Weight:	0.1 kg
Dimensions:	21 x 78 x 95 mm
Manufacturer / Brand:	Delta Electronics
Guarantee:	2 years