


Code: HS-004L

MULTIBAND AMPLIFIER **HS-004L**

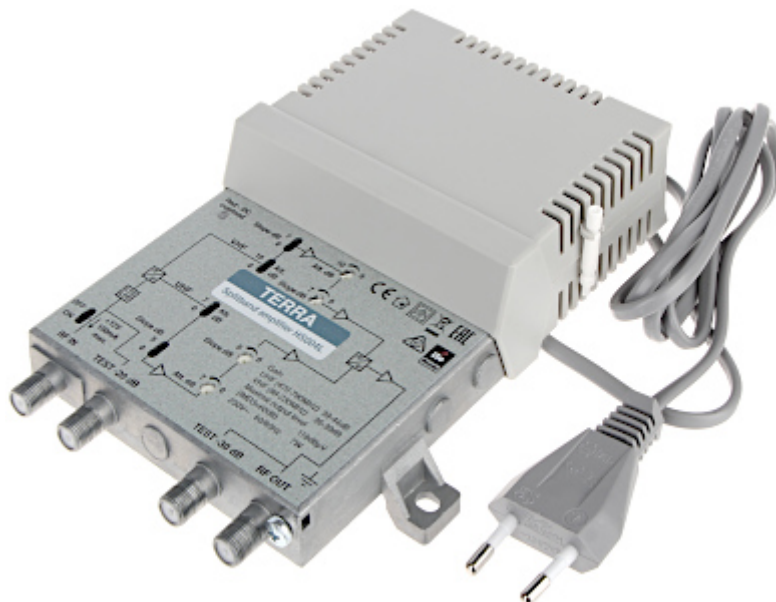

Frequency range:	88 MHz ... 230 MHz - VHF , 470 MHz ... 790 MHz - UHF
Gain :	36 dB ... 39 dB @ VHF 39 dB ... 44 dB @ UHF
Number of inputs/outputs:	1 / 1 + 2 (2 x test: -30dB, -20dB)
Gain adjustment:	0 dB ... 20 dB @ VHF , 0 dB ... 14 dB @ UHF
Slope adjustment:	14 dB @ VHF , 10 dB @ UHF
Maximal output level IMD3=60 dB DIN45004B:	121 dB μ V
S/N ratio:	< 6 dB
Power supply:	230 V AC
Power consumption:	5 W
Operation temp:	-20 °C ... 50 °C
Weight:	0.68 kg
Dimensions:	179 x 135 x 52 mm
Guarantee:	2 years