


Code: MC16-PAC-11

## ACCESS CONTROLLER MODULE **MC16-PAC-11** ROGER

The MC16-PAC-11 controller is a multifunctional electronic module, intended for use in the RACS 5 system, which enables the implementation of access control of the transition and building automation.

**Attention!** The pre-installed license includes functionality relating to control of the 11 transitions and building automation.

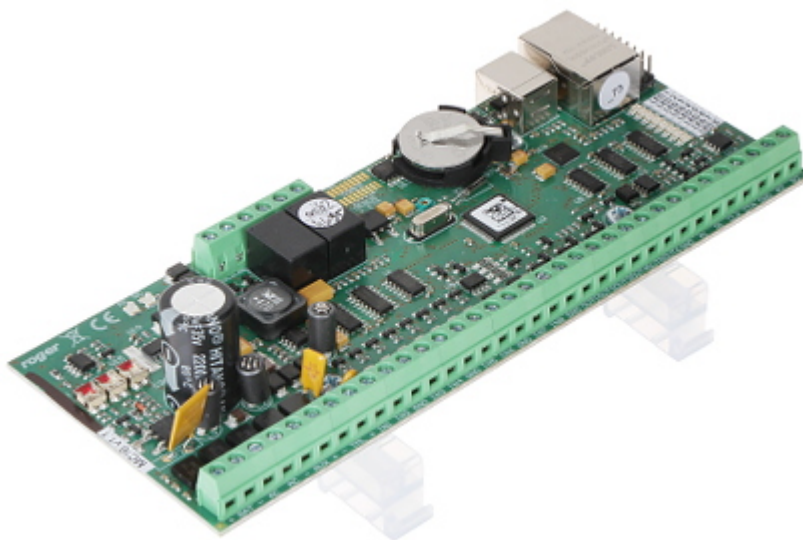

|                               |                                                                                                                                                     |
|-------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|
| Number of served transitions: | 11                                                                                                                                                  |
| Inputs:                       | 8                                                                                                                                                   |
| Outputs:                      | 8                                                                                                                                                   |
| Number of users:              | max. 8192 - Number of identifiers                                                                                                                   |
| Number of media per ID:       | 8 - Proximity card, PIN code, fingerprint, etc.                                                                                                     |
| Number of permissions per ID: | 32                                                                                                                                                  |
| Buffer memory:                | 8 000 000 events buffer                                                                                                                             |
| MCT readers support:          | 16 pcs                                                                                                                                              |
| Readers connections:          | 4 pcs - Wiegand / PRT                                                                                                                               |
| Number of login points:       | 22                                                                                                                                                  |
| Number of access terminals:   | 44                                                                                                                                                  |
| Number of access zones:       | 22                                                                                                                                                  |
| Number of alarm zones:        | 22                                                                                                                                                  |
| Number of automation nodes:   | 22                                                                                                                                                  |
| Battery backup support:       | 13.8 V / 7 Ah                                                                                                                                       |
| Communication:                | <ul style="list-style-type: none"> <li>• Ethernet 10BASE-T 10/100 Mb/s - RJ-45 socket</li> <li>• 2 x Port RS-485</li> <li>• RACS (Roger)</li> </ul> |

|                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|--------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Main features:                 | <ul style="list-style-type: none"> <li>• Control of automation from the system terminals</li> <li>• Presentation of alarm supervision states on terminals</li> <li>• Controlling the supervision state of the alarm system zones</li> <li>• Hardware integration with alarm system and fire system</li> <li>• Multifunctional parametric inputs including Double Wiring</li> <li>• Weekly access schedules</li> <li>• Multi-year calendars of exceptions</li> <li>• Integrated support in VISO software</li> </ul> |
| Power supply:                  | <ul style="list-style-type: none"> <li>• 17 ... 18 V AC</li> <li>• 10 ... 15 V DC</li> <li>• 22 ... 26 V DC</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                             |
| Operation temp:                | 5 °C ... 40 °C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Permissible relative humidity: | ≤ 95 % (non-condensing)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Weight:                        | 0.15 kg                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Dimensions:                    | 175 x 72 x 30 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Manufacturer / Brand:          | ROGER                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Guarantee:                     | <b>3 years</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |