


Code: AWZ-637

BUFFERED SWITCHING POWER SUPPLY ADAPTER **AWZ-637** FOR ACCESS CONTROLLERS DAHUA ASC PULSAR

Metal enclosure with 13.8VDC/6A buffer switching power supply and DIN TS-35 mounting rail. The product is dedicated to cooperate with the DAHUA access controllers of the series ASC21xxB, ASC12xxB.

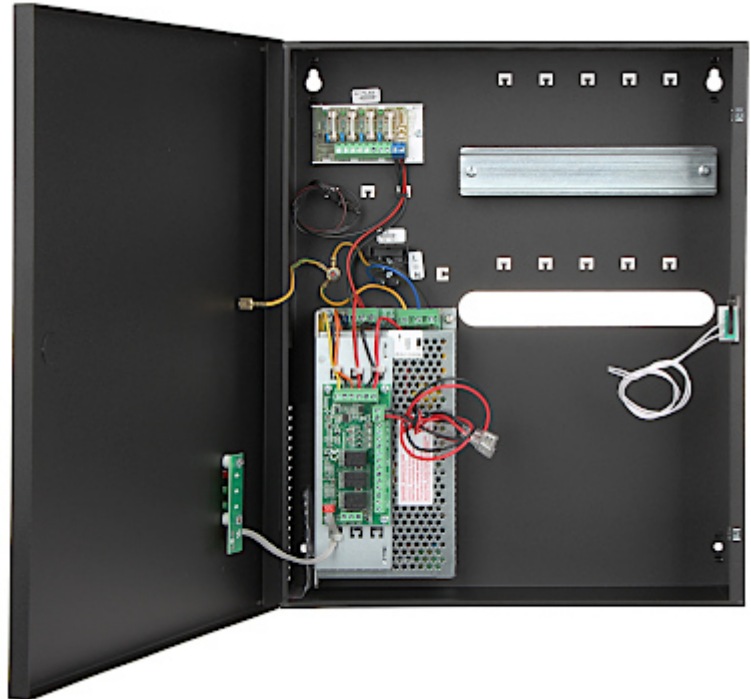

| | |
|------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Input voltage: | 230 V AC / 50 Hz |
| Output voltage: | 11 V ... 13.8 V DC (buffer operation) |
| Max. output current (total): | 7 A |
| Battery charging current: | 1 A / 2 A |
| Power: | 100 W |
| Number of outputs: | 4 |
| Tamper contact: | 50 V DC / 0.5 A |
| Main features: | <ul style="list-style-type: none"> • Built-in buffered power supply unit with battery and AC mains monitoring • Voltage distribution module, 4 circuits protected by 1.5A fuse • DIN TS-35 rail, Length : 185 mm • LED indication • Technical outputs of the relay type and OC • Place for battery - 12 V / 17 Ah |
| Protections: | <ul style="list-style-type: none"> • Short-circuit • Overload • Overvoltage • Tamper • Reverse polarity connection • Discharge |



DATA SHEET

| | |
|----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Adapter operation control: | <ul style="list-style-type: none">• AC input voltage presence indication AC• DC output voltage presence indication DC• Battery fault indication• EPS FLT output - indicating AC power collapse• PSU output indicating DC voltage loss or power supply unit failure• LoB output - Low battery voltage |
| Operation temp: | -10 °C ... 40 °C |
| Weight: | 3.26 kg |
| Dimensions: | 403 x 326 x 100 mm |
| Manufacturer / Brand: | PULSAR |
| Guarantee: | 2 years |