


Code: IPUPS-8-20-H

## POE SWITCH WITH BUFFERED POWER SUPPLY **IPUPS-8-20-H** 8-PORT ATTE

8-port PoE switch in an internal enclosure with a buffered power supply. 8 ports support Power over Ethernet (PoE) function.

The IPUPS-8-20-H set consists of XPOE-10-20A-OF switch module, AUPS-70-120-OF buffered power supply module and ASUC-100-480-OF voltage converter module enclosed in the ABOX-H internal enclosure with space for 2 18Ah batteries. The buffered PSUs are adapted to work with maintenance-free batteries (gel or AGM) with nominal voltage 12V.

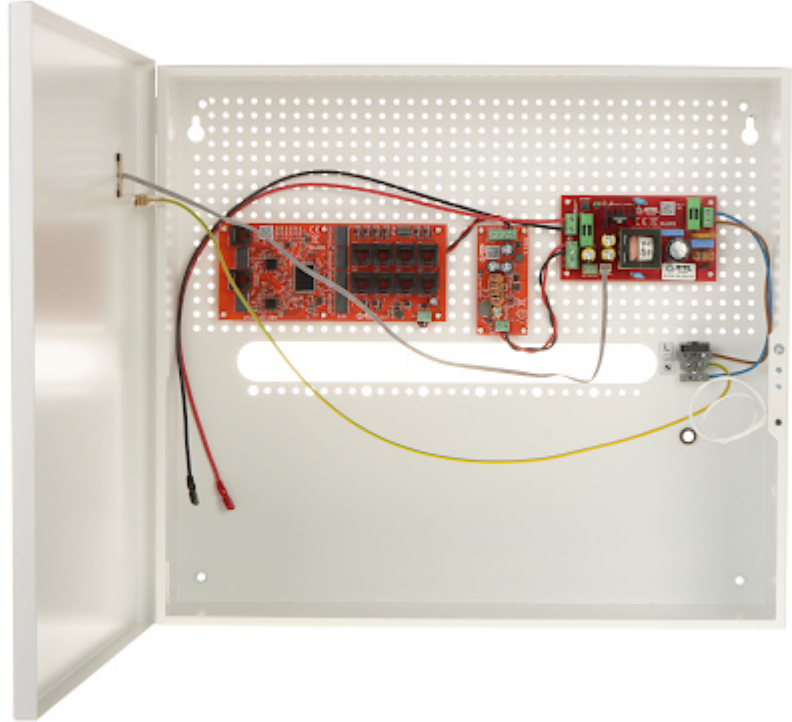

LAN ports:	<ul style="list-style-type: none"> <li>• 2 x RJ45 10/100/1000 Base-T - Uplink,</li> <li>• 8 x RJ45 10/100 Base-T + PoE (802.3af/at) / Passive PoE</li> </ul>
Management via WWW / console:	—
LED diodes:	AC, DC, CHARGING (battery charging), PoE, Gigabit Ethernet
Transmission speed:	<ul style="list-style-type: none"> <li>• 10 / 100 / 1000 Mbps : 2 x Port Uplink,</li> <li>• 10 / 100 Mbps : 8 x Port LAN &amp; PoE</li> </ul>
Maximal output power:	<ul style="list-style-type: none"> <li>• 40 W @ Passive PoE - LAN1 ... LAN8 ports,</li> <li>• 30 W @ PoE (802.3af/at) - LAN1 ... LAN8 ports</li> </ul>
Maximal total power:	60 W
Operation modes:	Standard : 100 m @ 10/100 Mb/s - LAN1 ... LAN8 ports

Main features:	<ul style="list-style-type: none"> <li>• 4K UHD support</li> <li>• The ability to independently turn on and off the PoE power for each of the LAN 1 ... LAN 8 ports</li> <li>• The modular design streamlines service tasks and enables quick and easy system expansion</li> <li>• The raster system of module assembly facilitates the expansion of the device by further modules</li> <li>• 2 x Place for battery : 12 V / 18 Ah</li> <li>• Place for recorder (NVR)</li> <li>• Battery charging current : 1 A / 2 A - (set with the JP1 jumper)</li> <li>• Battery - Protection against reverse polarity connection, Protection against deep discharge of the battery</li> <li>• Technical outputs of the OC type signaling loss of voltage at the PSU output (OUF) and loss of voltage in the 230V mains (ACF)</li> <li>• PSU thermal protection : 130 °C</li> <li>• Overload protection</li> <li>• LAN &amp; PoE ports - Short-circuit protection, Overvoltage</li> <li>• TAMPER switch indicating open the cover</li> <li>• "Index of Protection" : IP20</li> </ul>
Power supply:	190 ... 260 V AC
Weight:	4.40 kg
Dimensions:	455 x 405 x 150 mm
Manufacturer / Brand:	ATTE
Guarantee:	<b>3 years</b>