

DATA SHEET


Code: FTP/K5/LN/100M

OUTDOOR TWISTED PAIR CABLE FTP/K5/LN/100M NETSET

The FTP/K5/LN/100M twisted-pair cable is designed to professional applications of installation. The cable is designed for outdoor installations. Equipped with a messenger wire.

For convenience, cable is marking with length counter printed with 1 m distance step.

The cable complies with the CPR No. 305/2011 directive and meets the requirements of the PN-EN 50575 European standard which specifies requirements in fire conditions, test methods and rating of cables used as building material. The cable has a Declaration of Performance and a CE marking, which confirm its compliance with the guidelines of the CPR regulation.

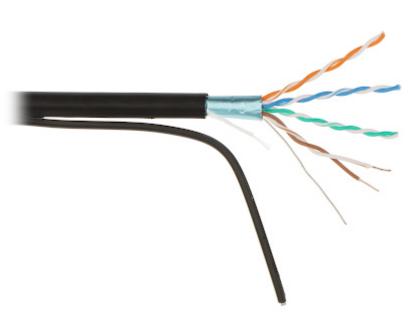

In section:	100 m . Price for 1m when buying a whole roll
Туре:	FTP cat. 5e Shielded + Messenger wire
Inner conductor:	Ø 0.5 mm, AWG 24, Cu wire
Resistance:	9.5 Ω / 100 m
Shield:	Polyester foil, Al foil
Outer coating:	Ø 6.2 mm LDPE
Main features:	 Messenger wire Ø 1.2 mm UV radiation resistant, moisture and water resistant Parameters far exceeding the requirements for Category 5e
Coating color:	Black
Supported norms:	EN50575:2014
Operation temp:	-20 °C 70 °C
Manufacturer / Brand:	NETSET
Guarantee:	15 years



FTP/K5/LN/100M